



## RADLOK™

Utilizing Amphenol's latest R4 RADSOK® Technology, our RADLOK™ product line was designed to be compact and robust.

Power Interconnect products in today's market often require additional mounting hardware (e.g. washers, clamps, bolts, nuts, etc.) making them prone to costly labor expenses for installation and routine maintenance.

Paired with Amphenol's RADLOK™ PIN, the single finger operation lock feature allows end users to connect any power distribution/storage system in a quick and secure manner.

The RADLOK™ product line is the answer to industries where a custom, reliable, easy to install, rugged, and cost effective solution is required.

### Features:

- Voltage Rating: 1000V
- Current Rating: 70A - 400A
- Tool-Free Mechanical Locking
- High cycle durability (500 mating cycles)
- RoHS compliant
- Available in Black, Red, Orange (custom colors available upon request)




# Dimensions

## RADLOK™ Connector (Tubular Version)


RADLOK™ Size (mm)	W	N	H	h	D	P
3.6	15.5	38.0	18.3	7.3	8.1	27.0
5.7	18.5	47.7	22.9	9.4	11.2	33.0
8.0	21.6	56.0	27.7	11.8	14.6	38.8
10.0	26.0	61.0	35.3	15.9	17.5	37.0
10.3	26.0	61.0	35.3	15.9	17.5	37.0
12.0	28.5	70.5	35.9	15.0	20.0	44.5

## RADLOK™ Connector (Stamped Version)



RADLOK™ Size (mm)	W	N	H	h	D	P
5.7	18.5	46.0	21.9	9.2	11.2	30.0
8.0	21.7	54.4	27.7	12.5	14.6	34.3
10.0	25.7	65.0	33.3	16.1	17.5	35.7



Tubular Lug Version



Stamped Lug Version




# Technical Data

DC Voltage Rating	1000V
DC Current Rating	70A - 400A
Flammability Rating	UL94 V0
Operating Temperature Range	-40° C to 125° C
Mating Cycles	500



Pin Type	Pin End	RADLOK™ Pin Size (mm)	Current (A)	RADLOK™ Dimensions (mm)													
				C	D	E	G	L	M	N	P	Q	S	W	Thread		
Pin	N/A	3.6	70	25.2	5.3	Ø 4.8							17.4	5	1.5	M 3 x 0.5-6g	
		5.7	120	33.9	7.8	Ø 7.0							21.1	10	1.5	M 6 x 1.0-6g	
		8	200	40.2	12.8	Ø 10.0							26.4	10	2.2	M 8 x 1.25-6g	
		10	300	47.4	12.8	Ø 12.0	N/A	N/A					32.2	N/A	3.2	N/A	M 10 x 1.5-6g
		10.3	350	47.4	12.8	Ø 12.0							32.2	10	3.2	N/A	M 10 x 1.5-6g
		12	400	47.9	15.8	Ø 14.5							32.9	10	2.8	N/A	M 12 x 1.75-6g
Feed Thru	Thread	3.6	70	32.5	13.1	Ø 13.7	19.2					16	24.5	5	M3	M 3 x 0.5-6g	
		5.7	120	42.1	16.2	Ø 16.2	21.7					18	27	10		M 6 x 1.0-6g	
		8	200	48.4	19.6	Ø 18.2	23.7					21	30	10		M 8 x 1.25-6g	
		10	300	62	23.0	Ø 20.2	25.7	N/A					24	33	16	M4	M 10 x 1.5-6g
		10.3	350	62	23.0	Ø 20.2	25.7						24	33	16		M 10 x 1.5-6g
		12	400	65	25.5	Ø 22.2	27.7						26	36	16		M 12 x 1.75-6g
Feed Thru	Lug	3.6	70	42.9	13.1	Ø 19.6	11.6	6	16	24.5	16.5	M3		4.2			
		5.7	120	51.1	16.2	Ø 21.6	13.6	8	18	27	18.5		6.3				
		8	200	62.4	19.6	Ø 23.6	15.6	10.5	21	30	22		8.5				
		10	300	71.2	23.0	Ø 25.6	17.6	12.5	24	33	24	M4	N/A	10.5	N/A		
		10.3	350	71.2	23.0	Ø 25.6	17.6	12.5	24	33	24		N/A	10.5			
		12	400	76	25.5	Ø 27.6	19.6	14.5	26	36	26		N/A	13			
Pin	Pin	3.6	70	42.8	13.1	Ø 13.7	19.2					16	24.5				
		5.7	120	51.2	16.2	Ø 16.2	21.7					18	27				
		8	200	64	19.6	Ø 18.2	23.7					21	30				
		10	300	78.5	23.0	Ø 20.2	25.7	N/A				24	33	N/A			
		10.3	350	78.5	23.0	Ø 20.2	25.7					24	33				
		12	400	80.2	25.5	Ø 22.2	27.7					26	36				

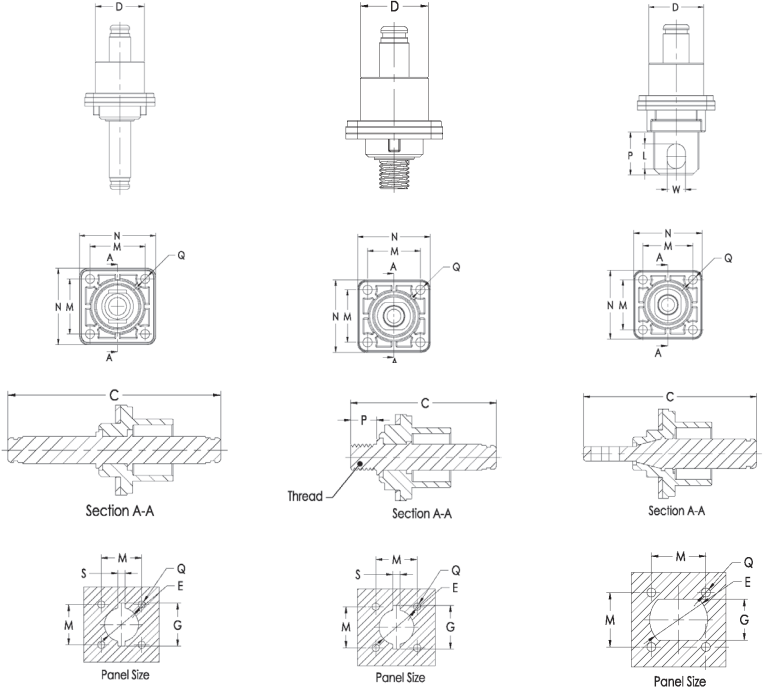

# How to Order

Product Type	Termination Type	RADSOK® **	(mm)	Lug Type	Cable Size (mm²) **	Current (A)	Length (mm)	Conn. Color	Stud Size	Pin End	Plating Type	Modification	
RL	CABLE ASSEMBLY	1 RDLK + RDLK	036	3.6	N/A	10	70	*	ORANGE	N/A	N/A	N/A	
		2 RDLK + POW LUG	057	5.7		16/25	90/120						M/E + STUD SIZE
		3 RDLK + POW LUG 45°	080	8.0		35/50	150/200						M/E + STUD SIZE
		4 RDLK + LUG TRMNL	100	10.0		50/70/95	200/250/300						M/E + STUD SIZE
		5 RDLK + RING TRMNL	103	10.3		95	350						M/E + STUD SIZE
		6 RDLK + BLUNT CUT	103	10.3		95	350						N/A
		7 RDLK + STRIPPED	120	12.0		120	400						STRIPPED LENGTH (mm)
CONNECTOR	0 RDLK CONNECTOR			1 TUBULAR			N/A						
		2 STAMPED											
PIN	9 RDLK PIN						N/A			10 THREAD	1 Silver	* / F1	
										20 LUG	2 Tin	* / F1	
										30 PIN-PIN	3 Nickel	* / F1	

**NOTE:**

- For all applications, care must be taken to ensure that RADLOK™ connection is protected from the transmittal of any mechanical loads induced by, but not limited to, vibration, bending, the mass of the cable, or shock loading. The cable/wiring should be secured as close to the RADLOK™ as possible. Custom mounting options and recommendations are available upon request.
- \* "Stud Size", M for Metric unit & E for Imperial unit. For example, M8 means Stud Size is 8mm; E3/4 means the Stud Size is 3/4 inch.

Examples:

- 10.0mm Orange RADLOK™ connector to 3/8" stud hole Lug Terminal, 10ft long 70mm² cable assembly would have part number, **RL4-100-70L3048E3/8**
- 8.0mm Black RADLOK™ connector with Tubular 50mm² cable crimp would have part number, **RL0-080-1-50BK**
- Silver plated 12.0mm RADLOK™ Feed Thru Pin would have part number, **RL9-120-101F1**

\* (Leave blank for default connector color or default pin without modification)

\*\* (10mm² cable is recommended for 3.6mm RADSOK®; 16mm²/25mm² cable is recommended for 5.7mm RADSOK®, ...etc)

For further information on your individual application requirements, contact: Amphenol Corporation

North America:  
Amphenol Industrial Operations  
180 N. Freeport Drive, Plant 4  
Nogales, AZ 85621  
Tel: (520) 285-5130  
Fax: (520) 285-5134  
Email: rpedrazzini@amphenol-aiio.com

Europe:  
Amphenol Industrial Operations Europe  
Via Barbaiana 5  
1-20020 Lainate (MI) Italy  
Tel: +39 02 93254.204  
Fax: +39 02 93254.444  
Email: info@amphenol-aiio.com

Middle East:  
Amphenol Middle East Enterprises FZE  
Office C-37 PO Box 21107  
Ajman Free Zone, UAE  
Tel: +9716-7422494  
Fax: +9716-7422941  
Email: ameezfe@eim.ae

Asia:  
Amphenol Technology (Zhuhai) Co., LTD  
No.63, Xin Han Rd., San Zao Town,  
Jin Wan District  
Zhuhai City, China 519040  
Tel: +0756-3989760  
Fax: +0756-3989768  
www.amphenol-industrial.com