

FRED


$$\begin{aligned} V_{RRM} &= 600 \text{ V} \\ I_{FAV} &= 2 \times 120 \text{ A} \\ t_{rr} &= 35 \text{ ns} \end{aligned}$$

Parallel legs

Part number

DFE240X600NA


Backside: Isolated

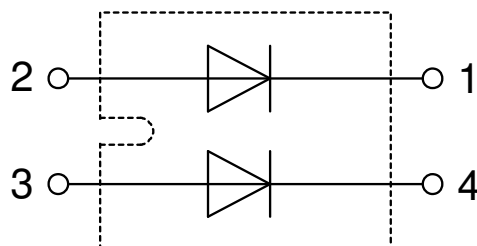 E72873


Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: SOT-227B (minibloc)

- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Terms and Conditions of Usage

The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact your local sales office.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact your local sales office.


Should you intend to use the product in aviation, in health or life endangering or life support applications, please notify. For any such application we urgently recommend

- to perform joint risk and quality assessments;
- the conclusion of quality agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

Fast Diode				Ratings					
Symbol	Definition	Conditions		min.	typ.	max.	Unit		
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V		
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V		
I _R	reverse current, drain current	V _R = 600 V	T _{VJ} = 25°C			3	mA		
		V _R = 480 V	T _{VJ} = 125°C			20	mA		
V _F	forward voltage drop	I _F = 120 A	T _{VJ} = 25°C			1.30	V		
		I _F = 240 A				1.55	V		
		I _F = 120 A	T _{VJ} = 150°C			1.20	V		
		I _F = 240 A				1.61	V		
I _{FAV}	average forward current	T _C = 80°C rectangular d = 0.5	T _{VJ} = 150°C			120	A		
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 150°C		0.80	V		
r _F	slope resistance					1.9	mΩ		
R _{thJC}	thermal resistance junction to case					0.4	K/W		
R _{thCH}	thermal resistance case to heatsink				0.10		K/W		
P _{tot}	total power dissipation	T _C = 25°C				312	W		
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		1.20	kA		
C _J	junction capacitance	V _R = 400 V f = 1 MHz		T _{VJ} = 25°C	107		pF		
I _{RM}	max. reverse recovery current	} I _F = 100 A; V _R = 300 V -di _F /dt = 600 A/μs		T _{VJ} = 25 °C	27		A		
				T _{VJ} = 125 °C	40		A		
t _{rr}	reverse recovery time			T _{VJ} = 25 °C	80		ns		
				T _{VJ} = 125 °C	150		ns		

Package SOT-227B (minibloc)				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				150	A
T_{VJ}	virtual junction temperature			-40		150	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		150	°C
Weight					30		g
M_D	mounting torque			1.1		1.5	Nm
M_T	terminal torque			1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	10.5	3.2			mm
$d_{Spb/Apb}$		terminal to backside	8.6	6.8			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000			V
		t = 1 minute		2500			V

Product Marking

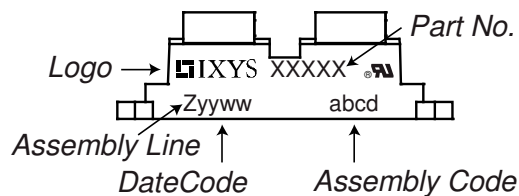

Part description

D = Diode
 F = FRED
 E = fast, low VF
 240 = Current Rating [A]
 X = Parallel legs
 600 = Reverse Voltage [V]
 NA = SOT-227B (minibloc)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DFE240X600NA	DFE240X600NA	Tube	10	522315

Equivalent Circuits for Simulation

* on die level


$T_{VJ} = 150^\circ\text{C}$

		Fast Diode	
$V_{0\max}$	threshold voltage	0.8	V
$R_{0\max}$	slope resistance *	1.4	mΩ

Outlines SOT-227B (minibloc)



Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

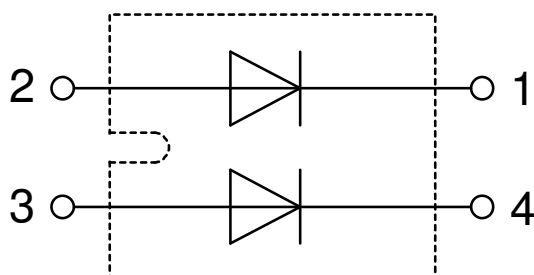

Fast Diode

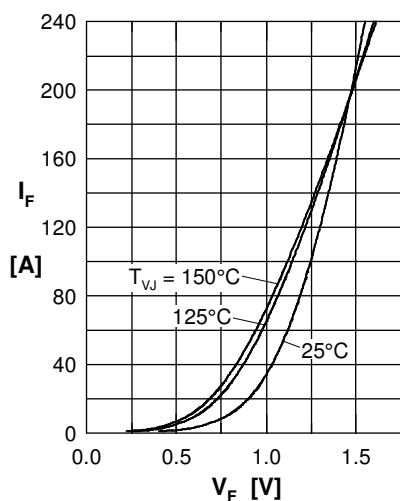


Fig. 1 Forward current I_F versus V_F

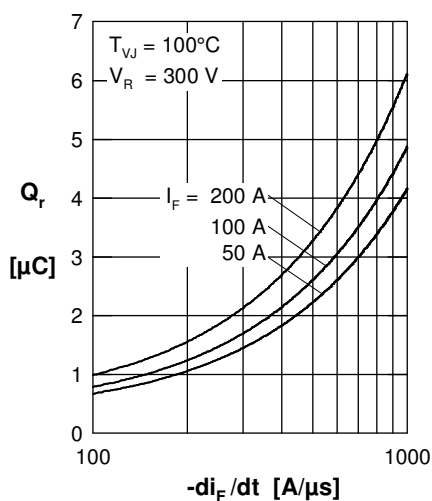


Fig. 2 Typ. reverse recov. charge Q_r versus $-di_F/dt$

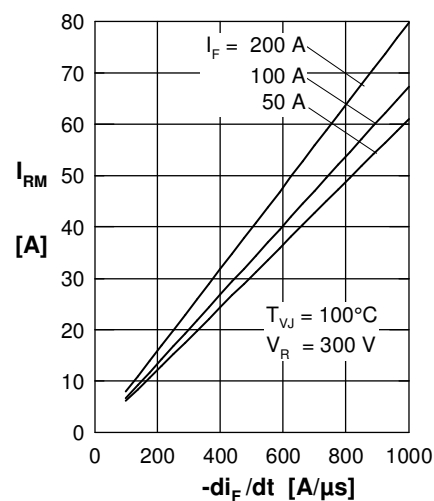


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

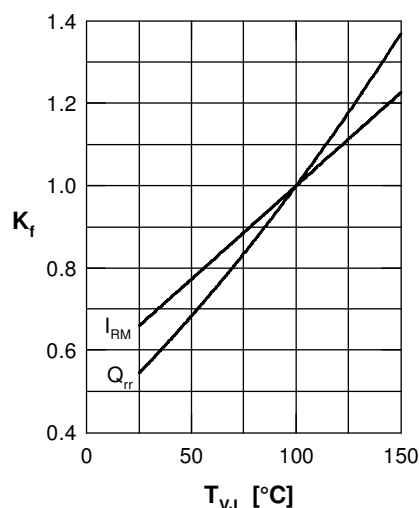


Fig. 4 Typ. dyn. parameters Q_r , I_{RM} versus T_{VJ}

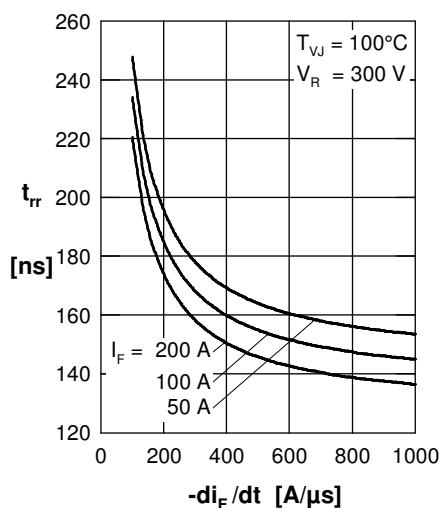


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

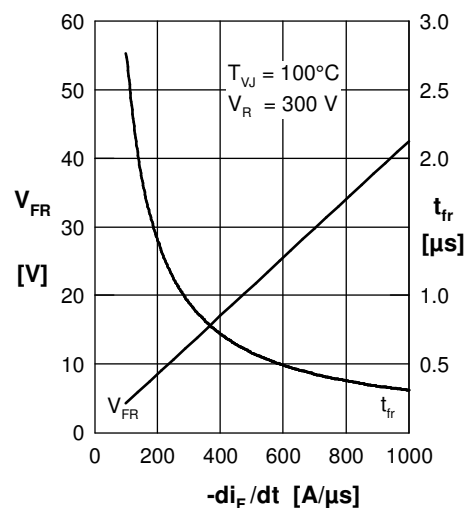


Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt

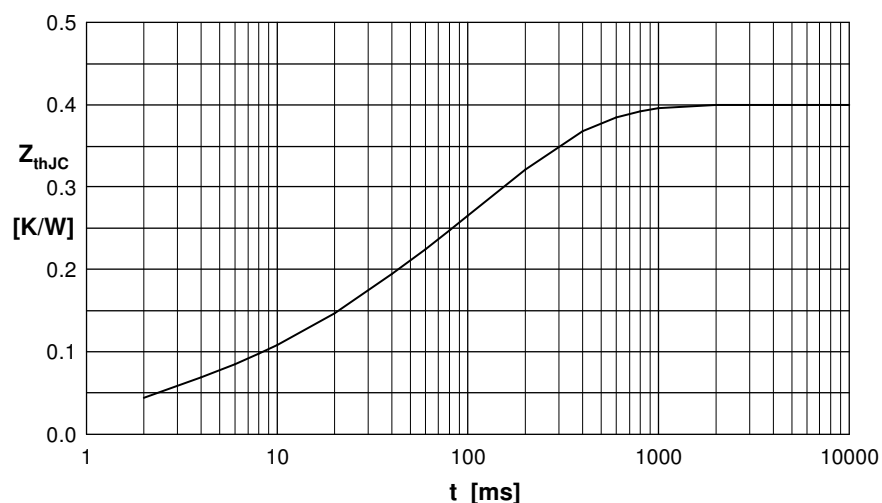


Fig. 7 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.040	0.010
2	0.045	0.002
3	0.070	0.026
4	0.110	0.300
5	0.135	0.110