



### FEATURES

- Encapsulated compact AC-DC power supply
- Single-, Dual- and Triple Output Models
- Over Load and Over Voltage Protection
- 3 Mounting Package Versions:
  - Solder pins for direct PCB mount
  - Screw terminal block for chassis mount
  - DIN-Rail Mounting
- Universal Input voltage range 85-264 VAC, 47-440 Hz
- 3kVAC Isolation, Protection Class II level
- UL/UL/IEC/EN 60950-1 Certified , CE Marked
- UL508 Approval (Selective)
- Lead free, RoHs Compliant
- 3 Year Product Warranty



The AA15S/D/T series , isolated fully encapsulated 15W AC/DC power module with 3,000VAC isolation. With Universal input voltage 85-264VAC and International safety approvals, these power modules are ideal for applications in commercial and industrial electronic equipment. These isolated AC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions. industrial electronic equipment.

### Model List

| Model Number | Output Voltage | Output Current | Input Current       |                   | Max. capacitive Load | Efficiency (typ.) | UL60950-1 Approval | UL508 Approval |
|--------------|----------------|----------------|---------------------|-------------------|----------------------|-------------------|--------------------|----------------|
|              |                |                | 115VAC, 60Hz        |                   |                      | @Max. Load        |                    |                |
|              | VDC            | Max. mA        | @Max. Load mA(typ.) | @No Load mA(typ.) | μF                   | @Max. Load %      |                    |                |
|              | AA15S0500A     | 5              | 3000                | 290               | 30                   | 3900              | 75                 | ○              |
| AA15S1200A   | 12             | 1250           | 275                 | 30                | 2200                 | 79                | ○                  | ○              |
| AA15S1500A   | 15             | 1000           | 275                 | 30                | 2200                 | 79                | ○                  | ○              |
| AA15S2400A   | 24             | 625            | 275                 | 30                | 1000                 | 79                | ○                  | ○              |
| AA15S4800A   | 48             | 310            | 273                 | 30                | 680                  | 79                | ○                  | ○              |
| AA15D1212A   | ±12            | ±650           | 275                 | 30                | *1500                | 79                | ○                  | ○              |
| AA15D1515A   | ±15            | ±500           | 275                 | 30                | *1500                | 79                | ○                  | ○              |
| AA15D0512A   | 5              | 1500           | 302                 | 30                | 2000                 | 72                | ○                  |                |
|              | *12            | 625            |                     |                   | 1500                 |                   |                    |                |
| AA15T051212A | 5              | 2000           | 290                 | 30                | 2200                 | 74                | ○                  |                |
|              | *12            | 200            |                     |                   | 1500                 |                   |                    |                |
|              | *.12           | -200           |                     |                   | 1500                 |                   |                    |                |
| AA15T051515A | *5             | 2000           | 284                 | 30                | 2200                 | 74                | ○                  |                |
|              | *15            | 150            |                     |                   | 1500                 |                   |                    |                |
|              | *.15           | -150           |                     |                   | 1500                 |                   |                    |                |

\* Output voltage accuracy 4% max.

\* For each output

## Input Characteristics

| Parameter                           | Model      | Min. | Typ. | Max. | Unit |
|-------------------------------------|------------|------|------|------|------|
| Input Voltage Range                 | All Models | 85   | ---  | 264  | VAC  |
| Input Frequency Range               |            | 47   | ---  | 440  | Hz   |
| Input Voltage Range                 |            | 120  | ---  | 370  | VDC  |
| Inrush Current (Cold Start at 25°C) | 115VAC     | ---  | ---  | 15   | A    |
|                                     | 230VAC     | ---  | ---  | 30   | A    |

## Output Characteristics

| Parameter                                              |     | Conditions                                                                                 |                            | Min. | Typ.  | Max.  | Unit       |
|--------------------------------------------------------|-----|--------------------------------------------------------------------------------------------|----------------------------|------|-------|-------|------------|
| Output Voltage Accuracy                                |     |                                                                                            |                            | ---  | ±1.0  | ±2.0  | %          |
| Line Regulation                                        |     | Vin=Min. to Max.                                                                           |                            | ---  | ±0.5  | ±1.0  | %          |
| Load Regulation                                        |     | Iout=Min. to Max.                                                                          | Single Output Models       | ---  | ±0.5  | ±1.0  | %          |
|                                                        |     |                                                                                            | Dual/ Triple Output Models | ---  | ±2.5  | ±5.0  | %          |
| Cross Regulation-<br>Dual Positives / Triple<br>Output | Vo1 | Measured output Io = 20% to 100% of rated load<br>Other output(s) set at 50% of rated load |                            | ---  | ±1.0  | ---   | %          |
|                                                        | Vo2 |                                                                                            |                            | ---  | ±2.5  | ---   | %          |
|                                                        | Vo3 |                                                                                            |                            | ---  | ±2.5  | ---   | %          |
| Ripple & Noise (20MHz)                                 |     | 5VDC Output Models                                                                         |                            | ---  | 1.5   | 1.8   | %VPP of Vo |
|                                                        |     | Other Output Models                                                                        |                            | ---  | 0.8   | 1.0   | %VPP of Vo |
| Minimum Load                                           |     |                                                                                            |                            | ---  | 10    | ---   | %Inom.     |
| Over Voltage Protection                                |     | Zener diode clamp                                                                          |                            | ---  | 120   | ---   | % of Vo    |
| Temperature Coefficient                                |     |                                                                                            |                            | ---  | ±0.01 | ±0.02 | %/°C       |
| Overshoot                                              |     |                                                                                            |                            | ---  | ---   | 5     | % Vout     |
| Current Limitation                                     |     | Foldback, auto-recovery<br>(long term overload condition may cause damage)                 |                            | 105  | ---   | ---   | %Inom.     |
| Short Circuit Protection                               |     | Hiccup mode, indefinite (automatic recovery)                                               |                            |      |       |       |            |

## General Characteristics

| Parameter                             | Conditions                        | Min.                                                    | Typ.                      | Max. | Unit                    |
|---------------------------------------|-----------------------------------|---------------------------------------------------------|---------------------------|------|-------------------------|
| I/O Isolation Voltage                 | Input to Output, 60 Seconds       | 3000                                                    | ---                       | ---  | VACrms                  |
| I/O Isolation Resistance              | 500 VDC                           | 100                                                     | ---                       | ---  | MΩ                      |
| Switching Frequency                   |                                   | ---                                                     | 100                       | ---  | KHz                     |
| Hold-up Time                          |                                   | ---                                                     | 20                        | ---  | ms                      |
| MTBF (calculated)                     | MIL-HDBK-217F@25°C, Ground Benign | 280,000                                                 | ---                       | ---  | Hours                   |
| Protection Class II                   | According IEC/EN 60536            |                                                         |                           |      |                         |
| Safety Approvals                      | cUL/UL 60950-1, IEC/EN 60950-1    |                                                         |                           |      |                         |
|                                       | UL508 for selective models        |                                                         |                           |      |                         |
| EMC Emission                          | Conducted and radiated            | EN 55011 class B, EN 55032 class B, FCC part 15 class B |                           |      |                         |
| EMC Immunity according<br>EN61000-6-1 | Standard                          |                                                         | Specification Requirement |      | Performance<br>Criteria |
|                                       | ESD                               | EN61000-4-2                                             | Air ±8KV Cont. ±4KV       |      | B                       |
|                                       | Radiated immunity                 | EN61000-4-3                                             | 10V/m                     |      | A                       |
|                                       | Fast transient                    | EN61000-4-4                                             | ±2KV,                     |      | B                       |
|                                       | Surge                             | EN61000-4-5                                             | ±1KV                      |      | B                       |
|                                       | Conducted immunity                | EN61000-4-6                                             | 10Vrms                    |      | B                       |
|                                       | PFMF                              | EN61000-4-8                                             | 30A/m                     |      | A                       |
|                                       | Dips                              | EN61000-4-11                                            | 30%, 10ms<br>>95%, 5000ms |      | B<br>C                  |




## Input Fuse

| All Models                  |                       |
|-----------------------------|-----------------------|
| Built-in Fuse               | 2A / 250VAC           |
| External Fuse (Recommended) | 1.5A Slow – Blow Type |

## Environmental Specifications

| Parameter                       | Conditions                       |                                         |
|---------------------------------|----------------------------------|-----------------------------------------|
| Temperature Range (operational) | Ambient                          | -25°C      +70°C                        |
| Storage Temperature Range       |                                  | -40°C      +85°C                        |
| Over Temperature Protection     | Internal IC junction temperature | 140°C shutdown, 65°C automatic recovery |
| Cooling                         | Free-Air convection              |                                         |
| Humidity (non condensing)       |                                  | ---      95 % rel. H                    |

## Power Derating Curve

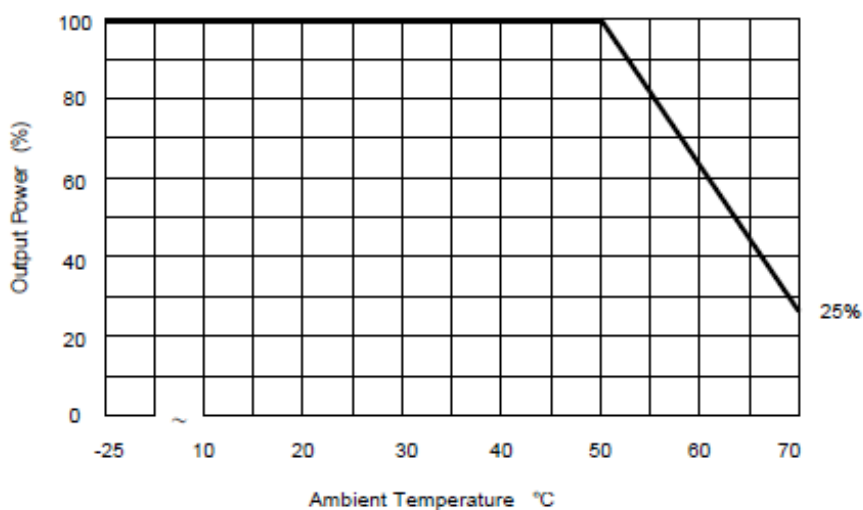

## Notes

- 1 All Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- 2 Ripple & Noise measurement bandwidth is 0~20 MHz
- 3 These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
- 4 Specifications are subject to change anytime without notice

## Mechanical Drawing PCB Mount

Mechanical Dimensions

The figure shows two views of a rectangular PCB mount. The bottom view is a rectangle with overall dimensions of 54.0 mm [2.13] in width and 74.0 mm [2.91] in height. It features two mounting holes, each with a diameter of 7.1 mm [0.28]. The distance between the centers of these holes is 39.8 mm [1.57]. The distance from the left edge to the center of the left hole is 7.1 mm [0.28], and from the right edge to the center of the right hole is 7.1 mm [0.28]. The distance from the top edge to the center of the top hole is 11.43 mm [0.45], and from the bottom edge to the center of the bottom hole is 11.43 mm [0.45]. The distance from the left edge to the center of the left hole is 8.89 mm [0.35], and from the right edge to the center of the right hole is 8.89 mm [0.35]. The side view shows a profile with a total width of 6.0 mm [0.24] and a total height of 19.5 mm [0.77]. The distance from the left edge to the center of the top hole is 0.7 mm [0.03]. The distance from the left edge to the center of the bottom hole is 5.0 mm [0.20]. The distance from the left edge to the center of the top hole is 19.5 mm [0.77]. The distance from the left edge to the center of the bottom hole is 5.0 mm [0.20].

Pin Connections

| Pin | Single             | Dual<br>(±12, ±15) | Dual<br>(0512) | Triple |
|-----|--------------------|--------------------|----------------|--------|
| 1   | AC(N) – AC Neutral |                    |                |        |
| 2   | AC(L) – AC Line    |                    |                |        |
| 3   | No Pin             |                    |                | -Vout3 |
| 4   | -Vout              | -Vout              | -Vout2         | Common |
| 5   | No Pin             | Common             | +Vout2         | +Vout2 |
| 6   | +Vout              | +Vout              | -Vout1         | -Vout1 |
| 7   | No Pin             |                    | +Vout1         | +Vout1 |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance:  $\pm 0.5$  ( $\pm 0.02$ )
- ▶ Pin diameter  $\Rightarrow 1.0 \pm 0.1$  ( $0.04 \pm 0.004$ )

## Physical Outline

|               |                                                               |
|---------------|---------------------------------------------------------------|
| Case Size     | : 74.0x54.0x19.5mm (2.91x2.13x0.77 inches)                    |
| Case Material | : Plastic resin + Fiberglass (flammability to UL 94V-0 rated) |
| Pin Material  | : Copper Alloy with Gold Plate Over Nickel Subplate           |
| Weight        | : 140g                                                        |

## Mechanical Drawings Chassis Mount (Option code, suffix C)

Mechanical Dimensions

The diagram shows the mechanical dimensions of a power supply unit. The top view is a rectangle with a central cutout. The overall width is 96.0 mm [3.78] and the overall height is 54.0 mm [2.13]. The central cutout has a width of 86.0 mm [3.39] and a height of 46.0 mm [1.81]. There are four mounting holes, each with a diameter of 3.5 mm, located at the corners. The distance between the centers of the two mounting holes on the left is 76.0 mm [2.99], and the distance between the centers of the two mounting holes on the right is 10.0 mm [0.39]. The distance between the center of the left mounting hole and the center of the right mounting hole is 96.0 mm [3.78]. The distance between the center of the left mounting hole and the center of the right mounting hole is 46.0 mm [1.81]. The distance between the center of the left mounting hole and the center of the right mounting hole is 54.0 mm [2.13]. The side view shows the unit has a height of 23.3 mm [0.92]. The base has a width of 5.0 mm [0.20] and a height of 16.8 mm [0.66]. The top view is labeled "Top view". The side view is labeled "Side view". The top view also shows a "POWER GOOD" indicator and an "Indication LED".

Connections

| Terminal | Single             | Dual (±12, ±15) | Dual (0512) | Triple |
|----------|--------------------|-----------------|-------------|--------|
| 1        | AC(N) – AC Neutral |                 |             |        |
| 2        | AC(L) – AC Line    |                 |             |        |
| 3        | NC                 |                 |             | -Vout3 |
| 4        | -Vout              | -Vout           | -Vout2      | Common |
| 5        | NC                 | Common          | +Vout2      | +Vout2 |
| 6        | +Vout              | +Vout           | -Vout1      | -Vout1 |
| 7        | NC                 |                 | +Vout1      | +Vout1 |

NC: No Connection


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 ( X.XXX±0.01)
- ▶ Pin pitch tolerance: ±0.25 (0.01)

## Physical Outline

|               |                                                               |
|---------------|---------------------------------------------------------------|
| Case Size     | : 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)                    |
| Case Material | : Plastic resin + Fiberglass (flammability to UL 94V-0 rated) |
| Weight        | : 130g                                                        |

## Mechanical Drawings Chassis Mounting with DIN Rail Kit (Option code, suffix D)


Mechanical Dimensions

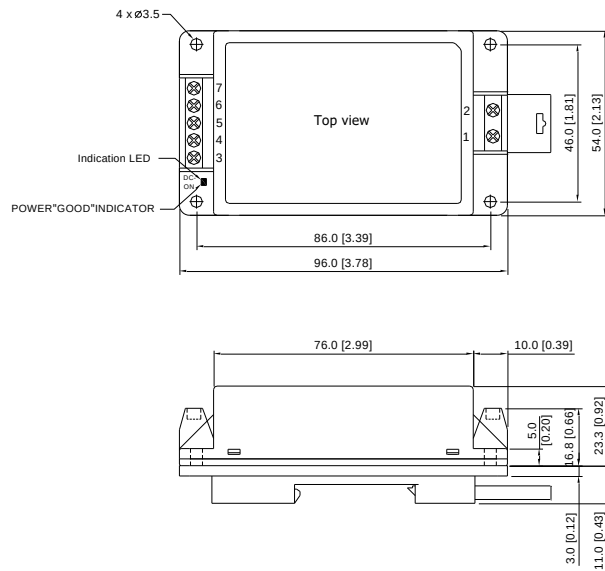

## Physical Outline

|               |                                                               |
|---------------|---------------------------------------------------------------|
| Case Size     | : 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)                    |
| Case Material | : Plastic resin + Fiberglass (flammability to UL 94V-0 rated) |
| Weight        | : 190g                                                        |

## DIN-Rail Mounting Kit

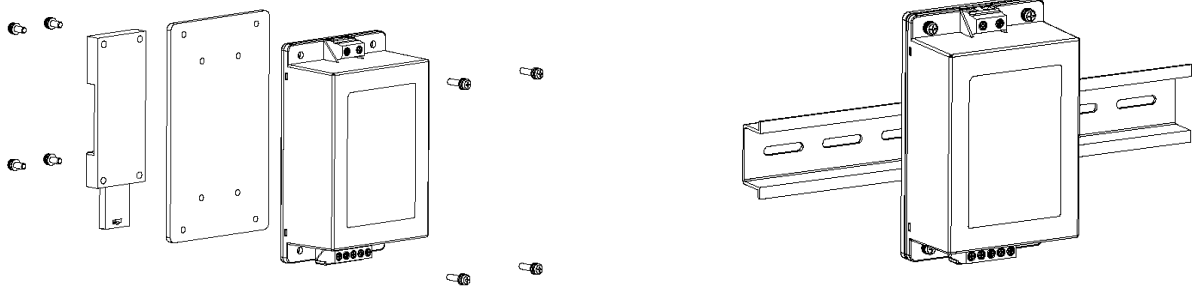



## Part Numbering System

| A                  | A                      | 15      | T                 | 05               | 12                  | 12                 | A                               |
|--------------------|------------------------|---------|-------------------|------------------|---------------------|--------------------|---------------------------------|
| Product typ        | Family series          | Watt    | Number of Outputs | Output Voltage I | Output Voltage II   | Output Voltage III | Option Code                     |
| AC/DC Power Module | Industrial application | 15 -15W | S - Single        | 05 - 5V          | 00 - not applicable | 12 - 12V           | A - PCB Mount                   |
|                    |                        |         | D - Dual          | 12 - 12V         | 12 - 12V            | 15 - 15V           | C - Chassis Mount               |
|                    |                        |         | T - Triple        | 15 - 15V         | 15 - 15V            |                    | D –C code module + Din-rail kit |
|                    |                        |         |                   | 24 - 24V         |                     |                    |                                 |
|                    |                        |         |                   | 48 - 48V         |                     |                    |                                 |

**Website:** [www.deltaww.com/dcdc](http://www.deltaww.com/dcdc)

**Email:** [dcdc@deltaww.com](mailto:dcdc@deltaww.com)

### USA:

Telephone:

East Coast: 978-656-3993

West Coast: 510-668-5100

Fax: (978) 656 3964

### Europe:

Phone: +31-20-655-0967

Fax: +31-20-655-0999

### Asia & the rest of world:

Telephone: +886 3 4526107

ext 6220~6224

Fax: +886 3 4513485

## WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice