
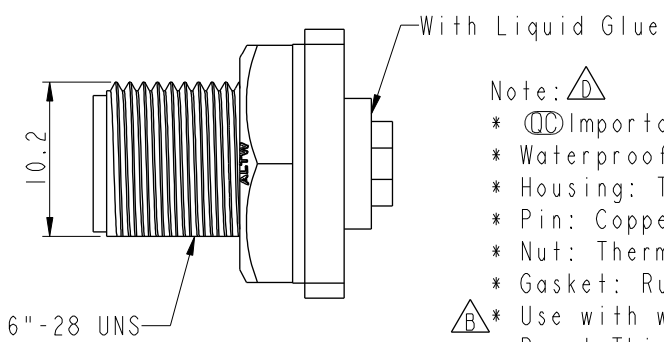
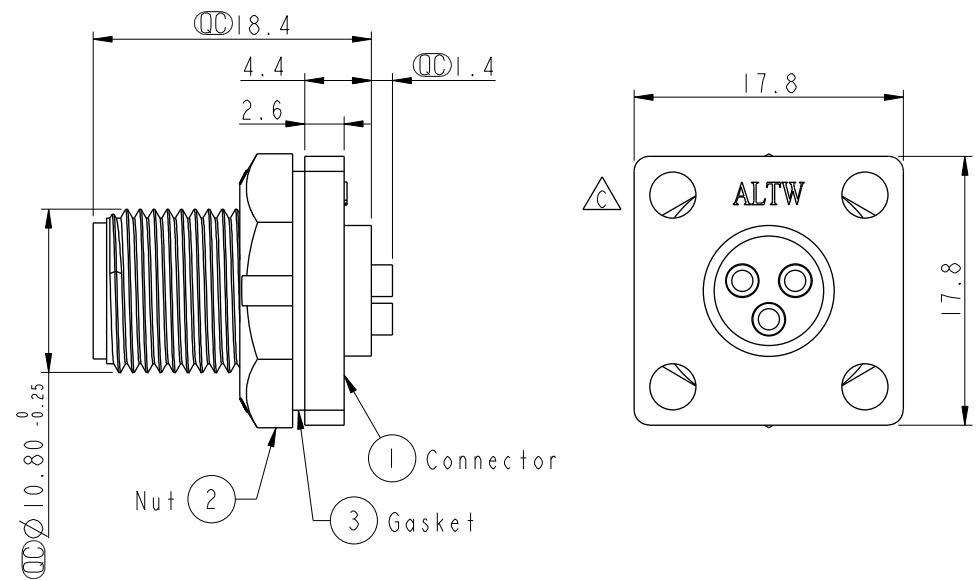


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0103	2008/09/16	Shin	Add Note
C	LEN1640071	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/18	Ruru	Modify Note

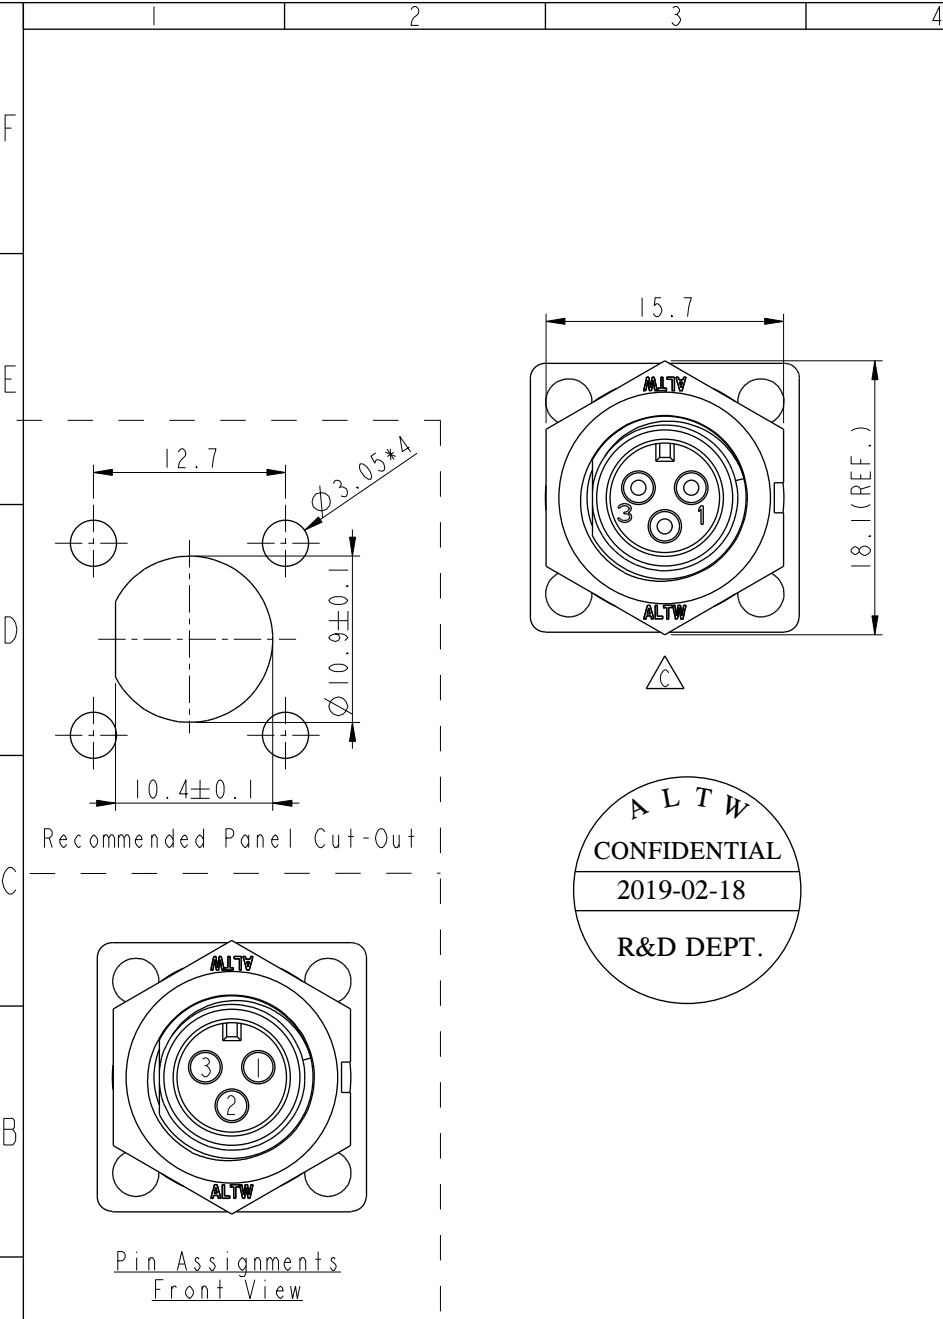

- Note:
- * Important Dimension To Check
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 4.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 5.0mm
 - * Gasket and Nut are packed separately in PE bags.

A	UNIT:mm		 		TITLE Mini Panel Screw 3Pin M Conn. M Pin				Amphenol LTW				ITEM NO AD-03PMMS-SS7001		DRAWN BY Ruru		DATE 2019-02-18						
	TOLERANCE		±0.25		SCALE 2:1		SIZE A4		SHEET 1 OF 1		DWG NO AD-03PMMS-SS7001				CHECKED BY Rita		DATE 2019-02-18						
	.X		±0.1		REV. D		WC-REV. A.2		QC: Inspection item		CUSTOMER ALTW				APPROVED BY Max		DATE 2019-02-18						
	.XX		±0.05																				
	.XXX		±1°																				
ANGLES																							
1			2			3			4			5			6			7			8		
																		W10B14-03-RW01A2					

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.