

1. MATERIALS AND FINISHES:
 FAKRA SMB PLUG: BODY - ZINC ALLOY, NICKEL PLATING
 CENTER CONTACT - BERYLLIUM COPPER, GOLD PLATING
 AMC PLUG: BODY - PHOSPHOR BRONZE, SILVER PLATING
 CENTER CONTACT - PHOSPHOR BRONZE, GOLD PLATING
 CABLE: 1.37MM MICRO-COAX

3. MECHANICAL:
A. RECOMMENDED LOCKWASHER TORQUE: 1.13 N-M [10 IN-LBS]

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-820-109-XXX, AND DATE CODE"

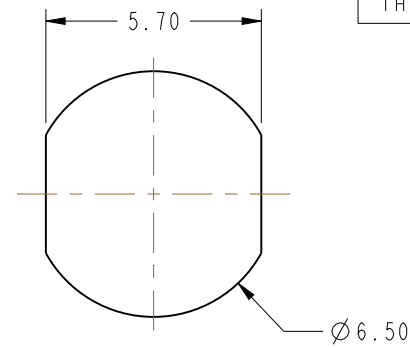


Diagram illustrating the assembly components and dimensions for the cable assembly:

- INTERFACE: FAKRA SMB PLUG
- GASKET
- LOCK WASHER
- 8MM HEX NUT
- 12.70 REF
- HEAT SHRINK TUBE
- LENGTH "L" (SEE TABLE)
- INTERFACE: AMC R/A PLUG

PART NUMBER TABLE	
PART NUMBER	LENGTH "L" MM [IN]
95-820-109-05Y	50.00±5.00 [1.97±.20]
95-820-109-10Y	100.00±5.00 [3.94±.20]
95-820-109-15Y	150.00±5.00 [5.91±.20]
95-820-109-20Y	200.00±5.00 [7.87±.20]
95-820-109-25Y	250.00±5.00 [9.84±.20]
95-820-109-30Y	300.00±5.00 [11.81±.20]

ADDITIONAL LENGTHS AND FAKRA KEY CODES AVAILABLE BY
CHANGING XXX TO DESIRED LENGTH IN MM AND FAKRA KEY CODE.
CONTACT AMPHENOL RF MARKETING FOR QUOTE.
EXAMPLE: -09B IS 90MM WITH FAKRA KEY CODE "B"

FAKRA KEY TABLE			
KEY CODE	ASSEMBLY PART #	COLOR	RAL NO.
A	95-820-109-XXA	JET BLACK	9005
B	95-820-109-XXB	CREAM	9001
C	95-820-109-XXC	SIGNAL BLUE	5005
D	95-820-109-XXD	CLARET VIOLET	4004
E	95-820-109-XXE	LEAF GREEN	6002
F	95-820-109-XXF	NUT BROWN	8011
G	95-820-109-XXG	BLUE GREY	7031
H	95-820-109-XXH	HEATHER VIOLET	4003
I	95-820-109-XXI	BEIGE	1001
K	95-820-109-XXK	CURRY	1027
L	95-820-109-XXL	CARMINE RED	3002
M	95-820-109-XXM	PASTEL ORANGE	3003
N	95-820-109-XXN	PASTEL GREEN	6019
Z	95-820-109-XXZ	WATER BLUE	5021

☒ FREQUENCY: DC TO 6 GHz	☒ CONTINUITY
☒ VSWR : 1.30 MAX @ 2 GHz 1.50 MAX @ 6 GHz	☒ HI-POT :200 VRMS
☐ INS. LOSS ----- dB MAX	☐ OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°					MATERIAL		DRAWN		DATE		TITLE IP-67 FAKRA STR SMB PLUG TO AMC R/A PLUG ON 1.37MM CABLE, VARIOUS LENGTH				Amphenol RF www.amphenolrf.com			
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.					SEE NOTES		K. SONG		26-FEB-18									
					REFERENCE		ENGINEER		DATE									
					EAR# 8550		B. GREENBAUM		16-OCT-17									
					REF: TRUE		APPROVED		DATE		SCALE: 3.0:1.0		SHEET 2 OF 2		DRAWING NO. 95-820-109-XXY			
CONFIGURATION LEVEL: In Work		S. HSIEH		27-FEB-18														
FINISH					CAD FILE		DWG SIZE				REV							
							B											
											ITEM NO. 95-820-109-XXY							
											PART NO. 95-820-109-XXX							