

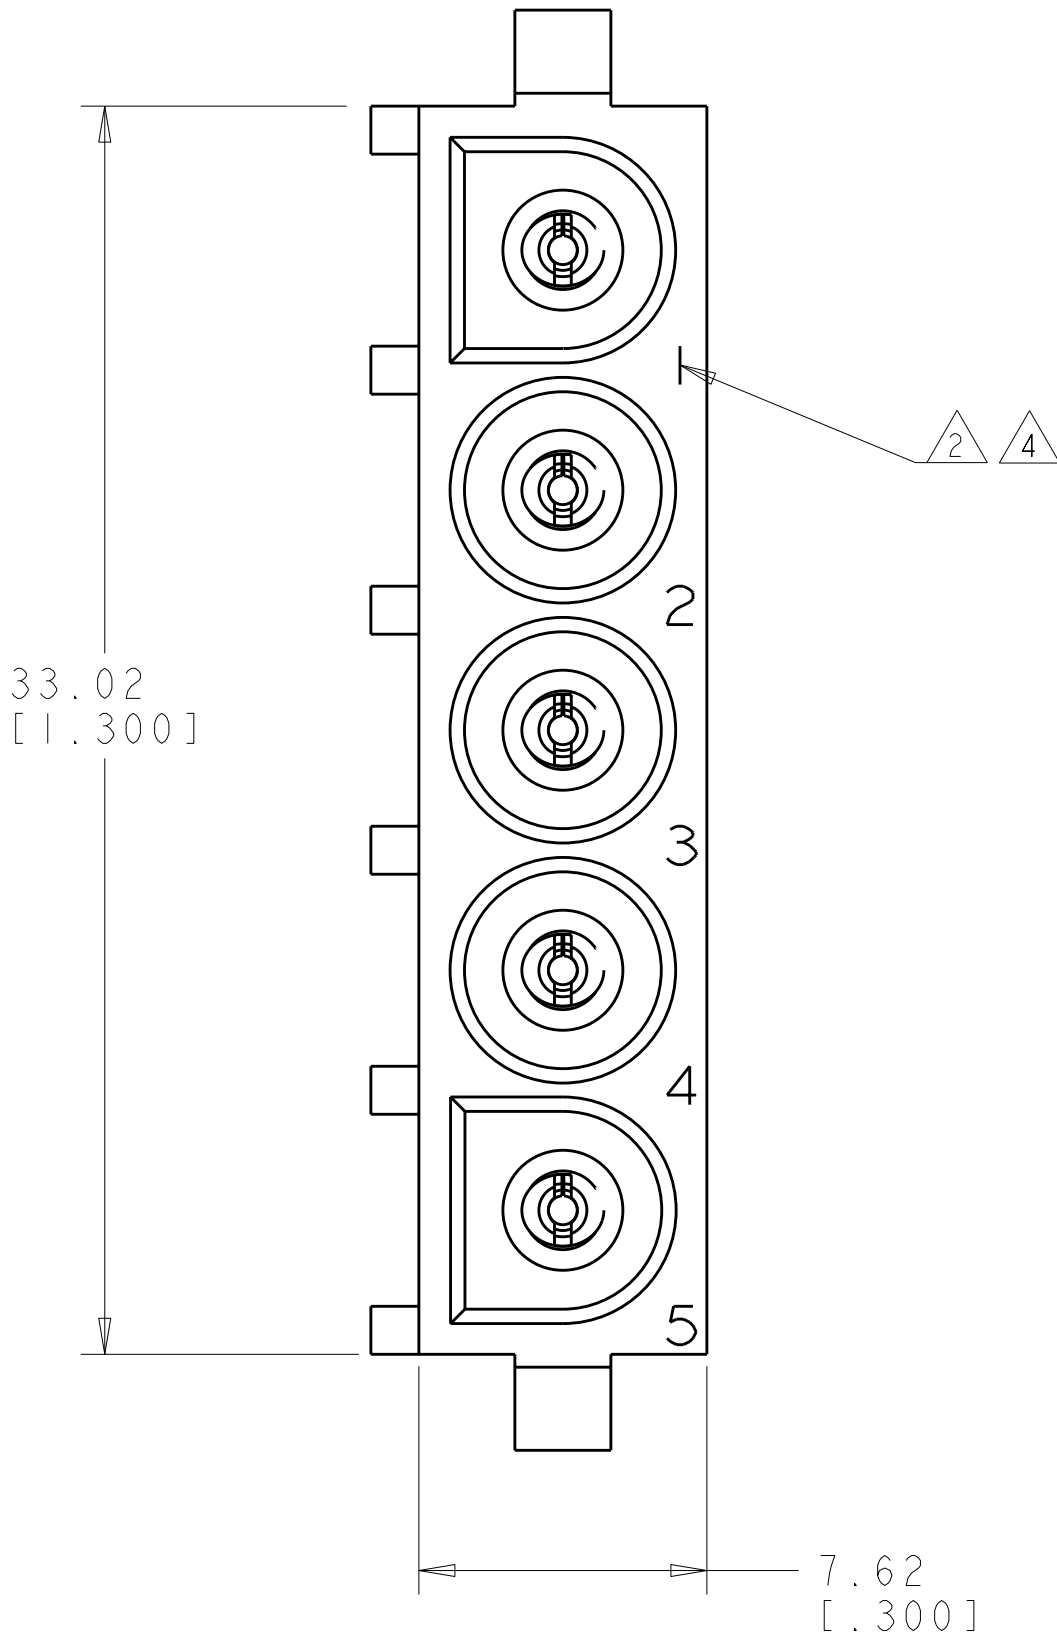
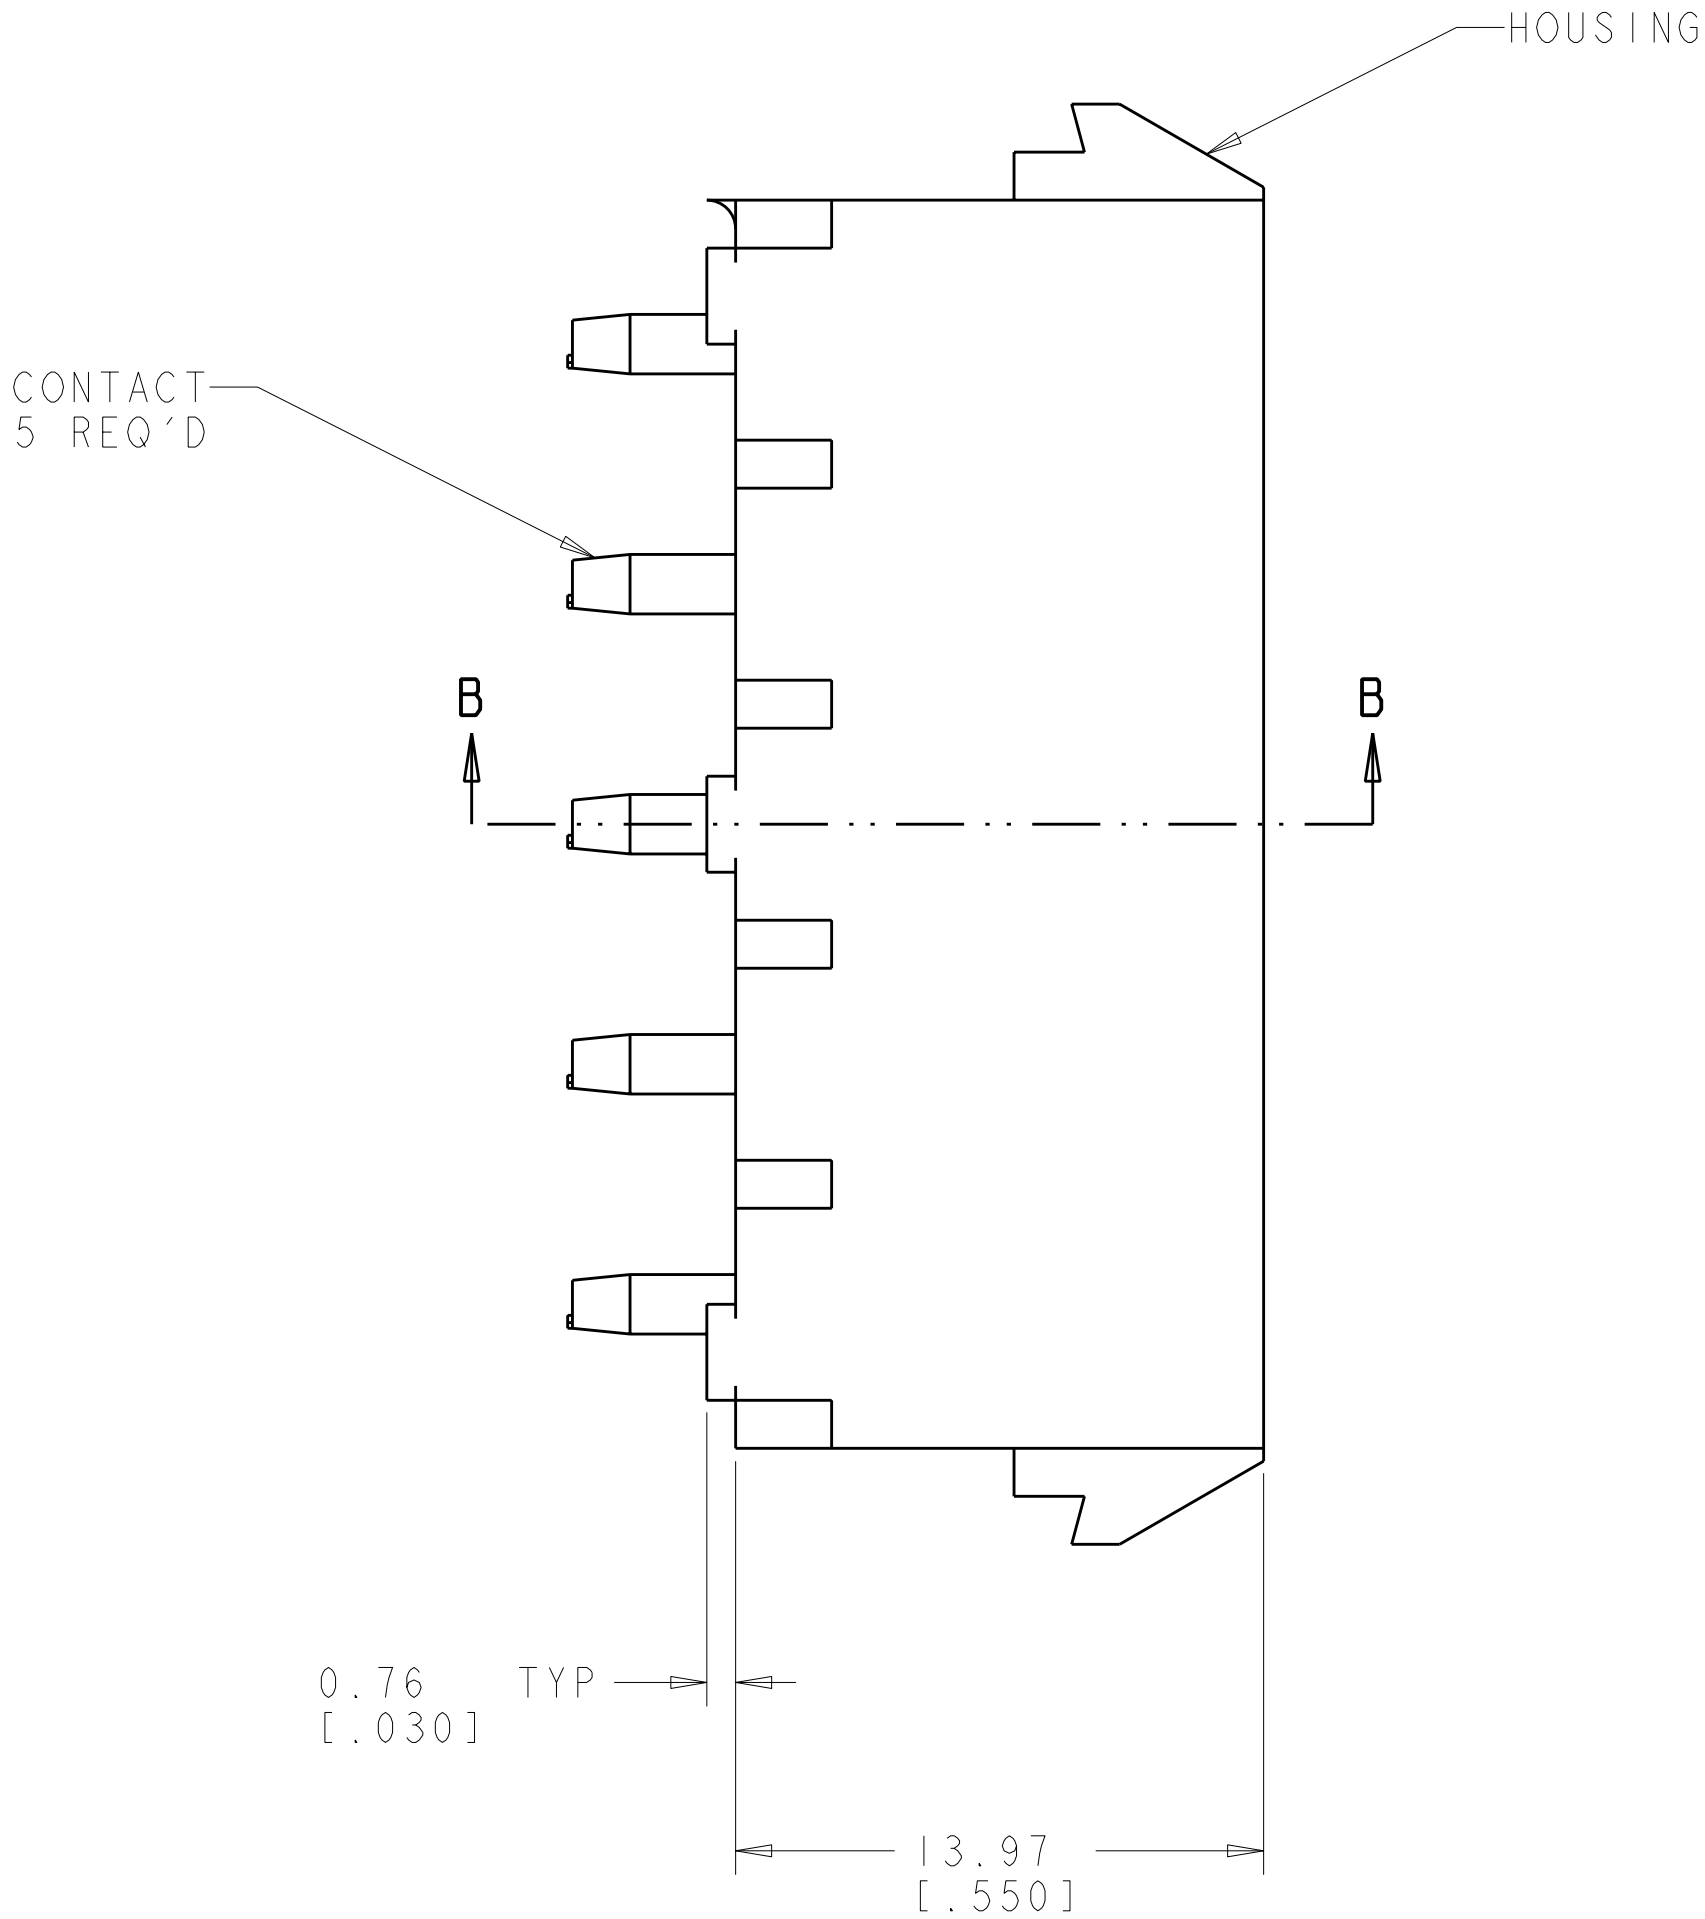



LOC		DIST		REVISIONS						
CM		00		P	LTR	DESCRIPTION	DATE	DWN	APVD	
				0		REVISED PER 0638-0087-04	07MAY04	KW	SR	
				01		REVISED PER ECO-05-001793	27MAY05	KW	SR	
				02		REVISED PER ECO-09-025699	11DEC09	KK	AEG	

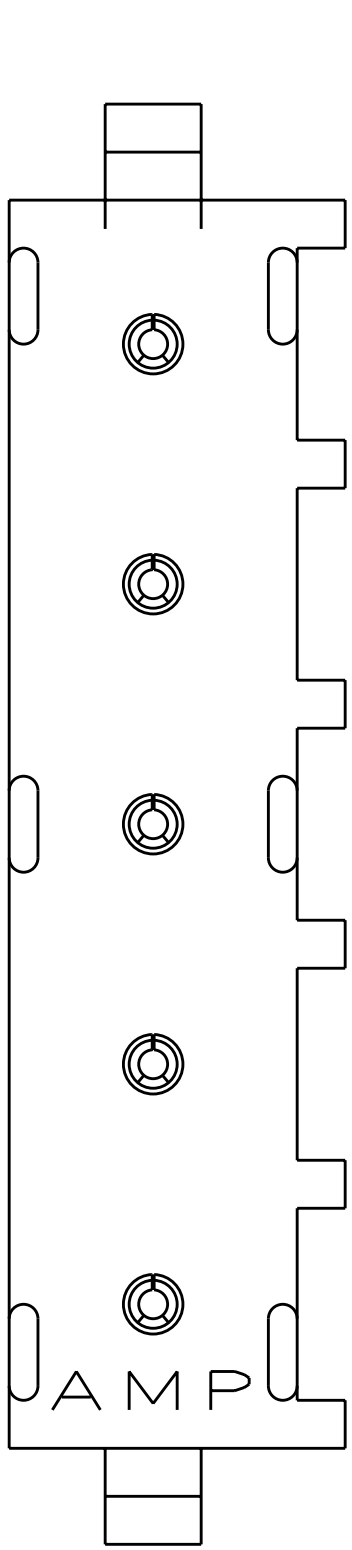


1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. IDENTIFICATION WILL APPEAR AT CIRCUIT NO. 1, OTHERS OPTIONAL.
5. CONTACT IS PLATED WITH 0.00127 [.000050] NICKEL, THEN 0.000075 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

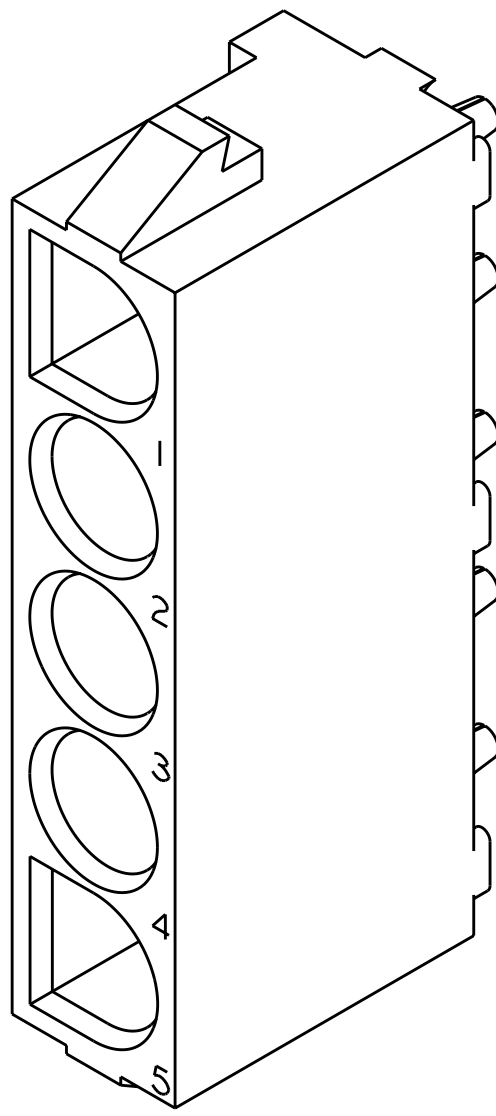


SCALE 4:1

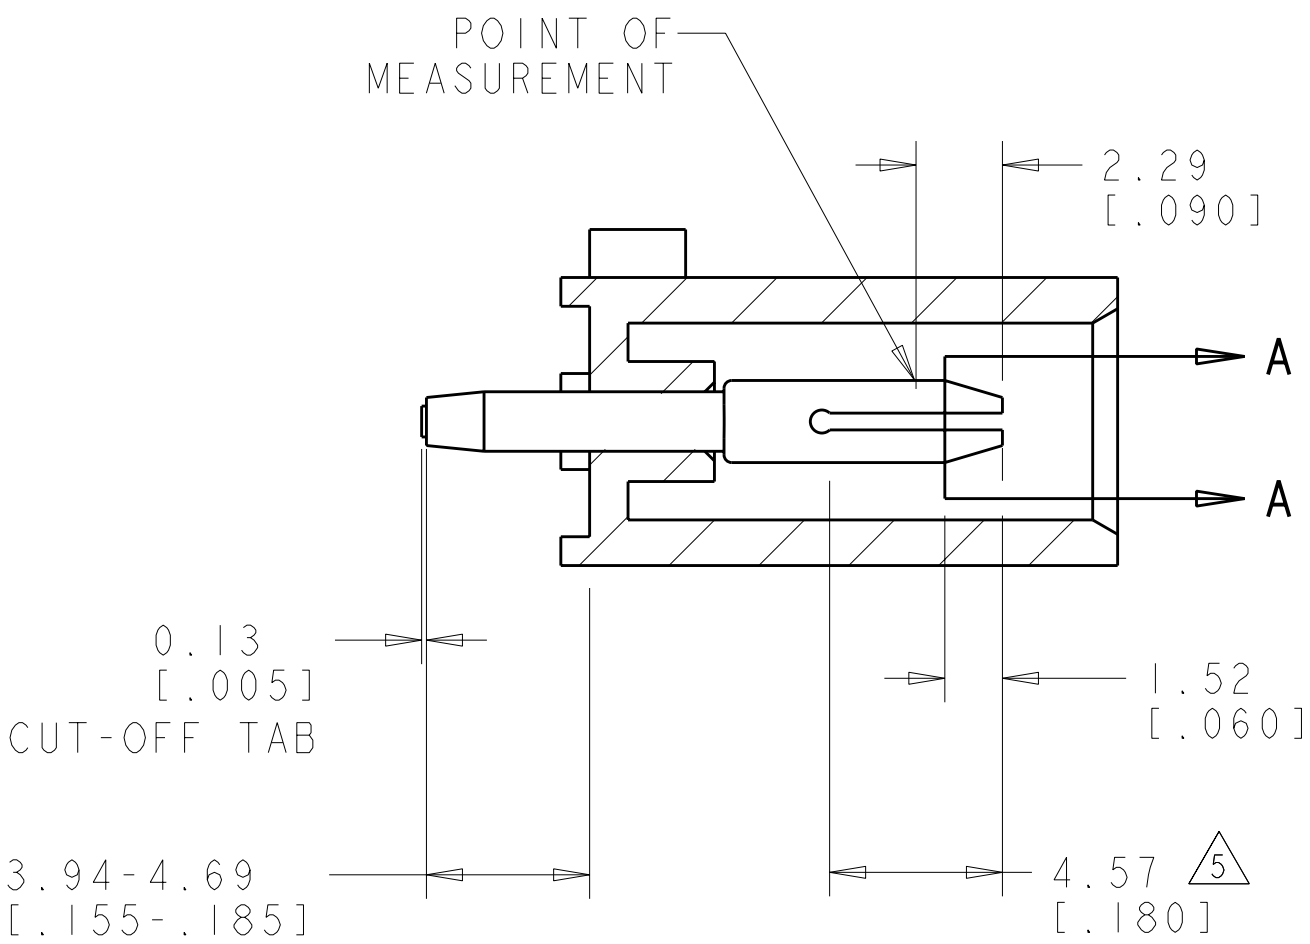

SECTION B-B

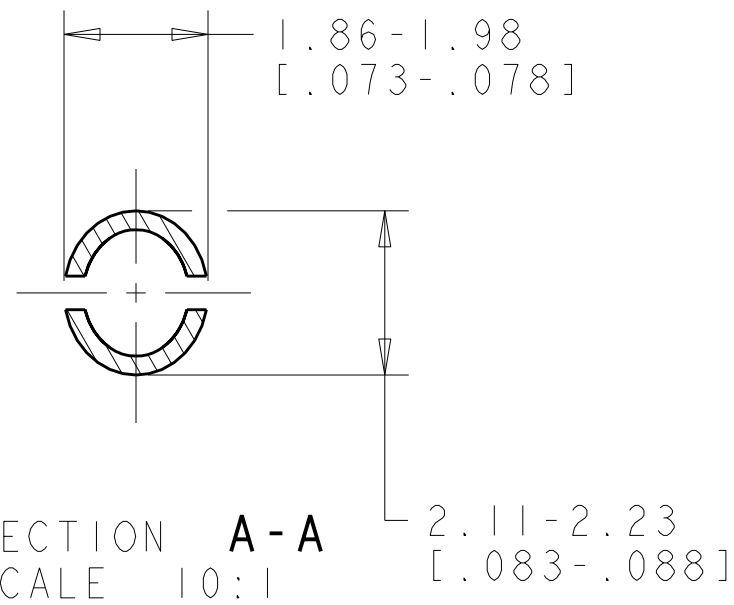

SECTION A-A
SCALE 10:1

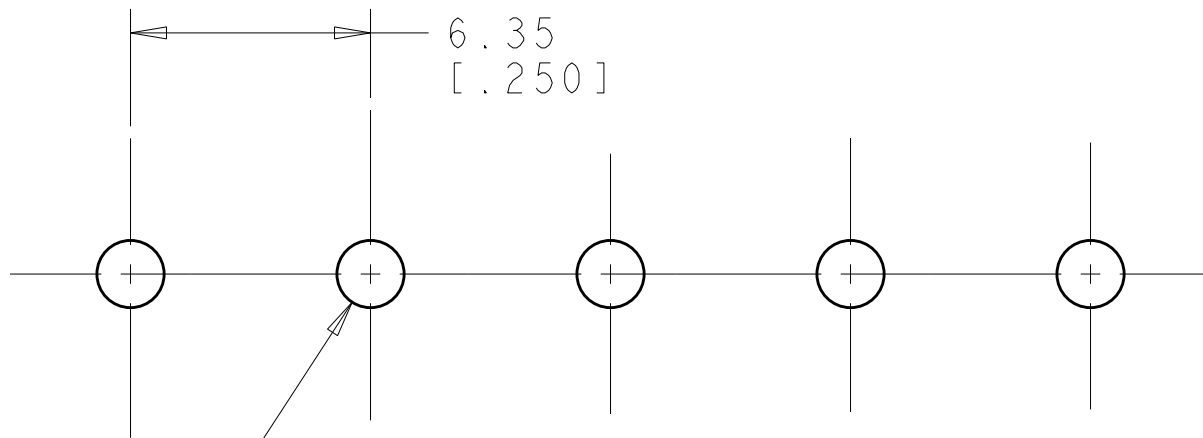

Ø1.78±0.07
[.070±.003]
5 PLC

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

6	OBSOLETE	PHOSPOR BRONZE, GOLD 5	NYLON, UL94V-2,NATURAL	1586134-2
		PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2,NATURAL	1586134-1
		PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

1. THIS DRAWING IS TO CONTINUE TO BE USED FOR THE ENTIRE LIFE OF THE PART. ANY CHANGES TO THE PART MUST BE APPROVED BY THE DESIGNER. ANY CHANGES TO THE PART MUST BE APPROVED BY THE DESIGNER. ANY CHANGES TO THE PART MUST BE APPROVED BY THE DESIGNER.		DWN R. WHITAKER 07MAY04		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK S. RIDGILL 07MAY04	
		1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°-10°		APVD S. RIDGILL 07MAY04	
MATERIAL SEE TABLE		FINISH SEE TABLE		NAME PIN HEADER ASSEMBLY, 5 CIRCUIT,NO DRAIN HOLES, UNIVERSAL MATE-N-LOK™	
		WEIGHT -		APPLICATION SPEC	
		CUSTOMER DRAWING		SIZE CAGE CODE DRAWING NO	
				A1 00779 C=1586134	
				RESTRICTED TO	
				SCALE 5:1 SHEET 1 OF 1 REV 02	

