


880060

1227.6 MHz GPS L2 BAW Filter

Applications


- For GPS L2 Applications
- For high-selectivity applications

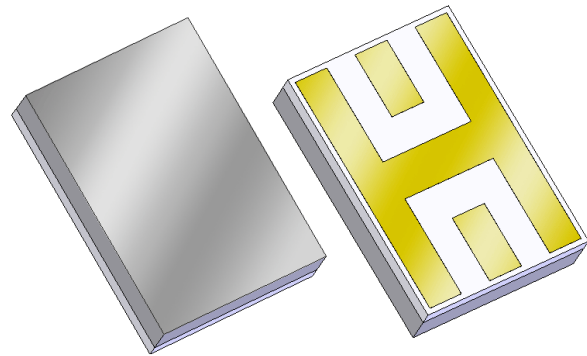

Product Features

- Usable bandwidth 25 MHz
- Low loss
- High selectivity
- Single-ended operation
- Ceramic chip-scale Package (CSP)
- Small Size
- Hermetic **RoHS** compliant, **Pb-free**

Functional Block Diagram

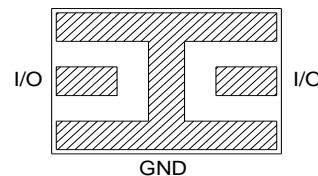

Overall width, length, and thickness are the only critical dimensions. All other dimensions are for reference only.

Dimensions shown are nominal in millimeters
All tolerances are $\pm 0.13\text{mm}$ except overall length and width $\pm 0.25\text{mm}$

Body: *Sapphire*
Package: *Alumina*


Terminations: *Au* plating 0.5 - 2.5 μm , over a 2.0 – 6.0 μm *Ni* plating

Pin Configuration

| Pin # | SE-Balanced | Description |
|-------|-------------|--------------|
| I/O | | Input/Output |
| GND | | Ground |

Ordering Information

| Part No. | Description |
|-------------------|------------------|
| 880060 | packaged part |
| 880060 Eval Board | evaluation board |

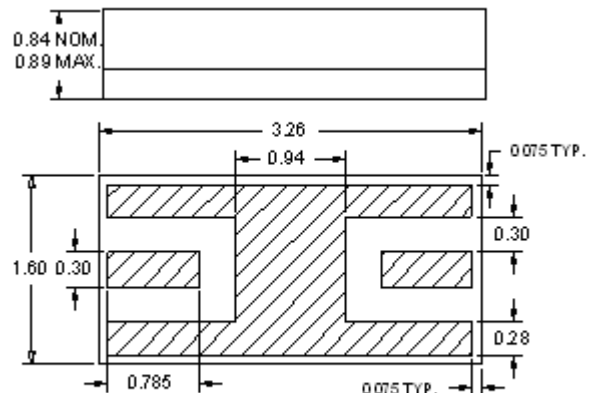

Specifications

Electrical Specifications ⁽¹⁾

Specified Temperature Range: ⁽²⁾ -40 to +85 °C

| Parameter ⁽³⁾ | Conditions | Min | Typical ⁽⁴⁾ | Max | Units |
|--|------------------------------|--------|------------------------|--------|-------|
| Center Frequency | | - | 1227.6 | - | MHz |
| Maximum Insertion Loss | @ 1227.6 MHz | - | 1.8 | 2.5 | dB |
| 3dB Bandwidth | Reference loss at 1227.6 MHz | 25 | 30 | - | MHz |
| 20dB Lower Frequency Edge | | 1195.6 | 1200 | - | MHz |
| 20dB Upper Frequency Edge | | - | 1254 | 1259.6 | MHz |
| VSWR | @ 1227.6 MHz | - | 1.6 | 2.0 | - |
| Source Impedance (single-ended) ⁽⁵⁾ | | - | 50 | - | Ω |
| Load Impedance (single-ended) ⁽⁵⁾ | | - | 50 | - | Ω |

Notes:


1. All specifications are based on the TriQuint schematic for the main reference design shown on page 3
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. This is the optimum impedance in order to achieve the performance shown

880060

1227.6 MHz GPS L2 BAW Filter

Reference Design


Schematic

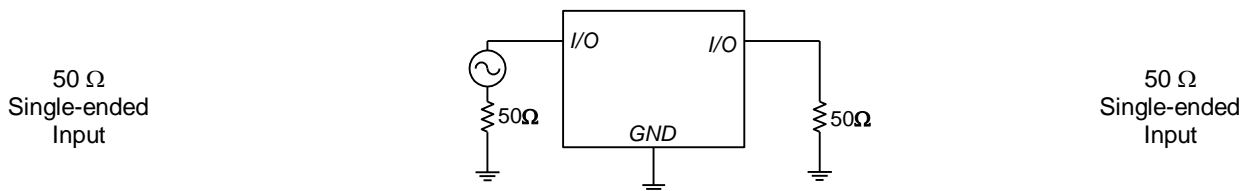

PC Board

Refer to [PCB Layout](#) for more information.

Mounting Configuration

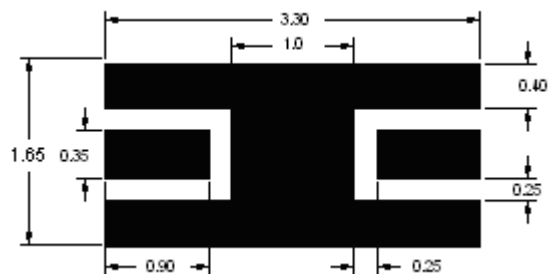


Notes:


1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.

Typical Performance (at room temperature)


S21 Amplitude Response

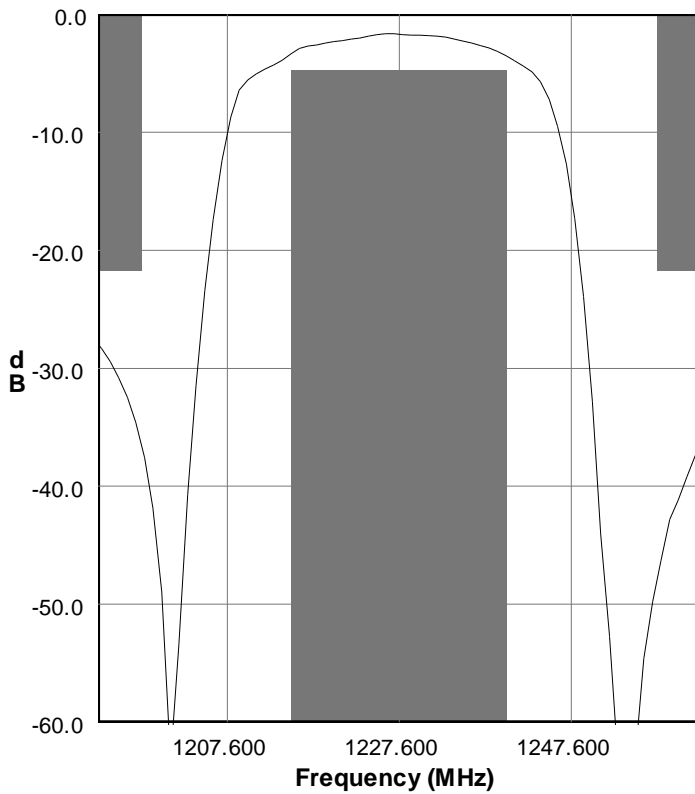


S21 Amplitude Response

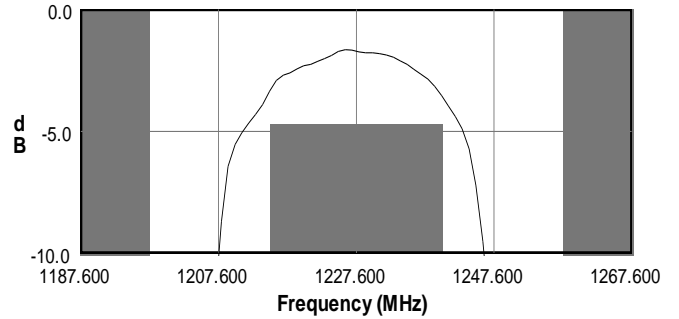


S21 Group Delay Response

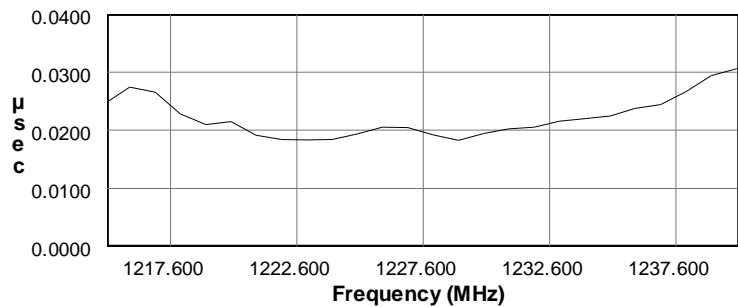

S11 Smith Chart

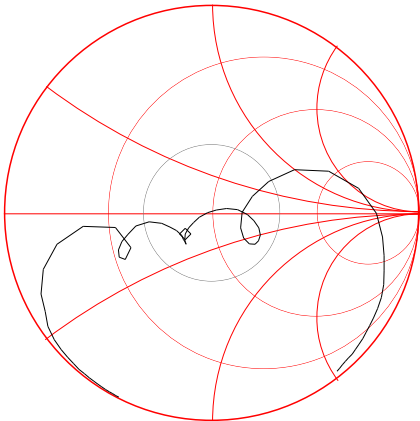


S11 VSWR

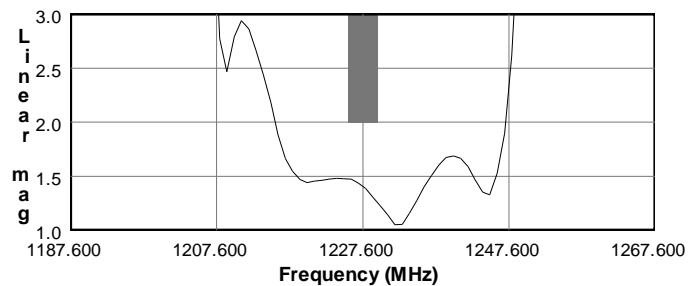

Mechanical Information

Marking

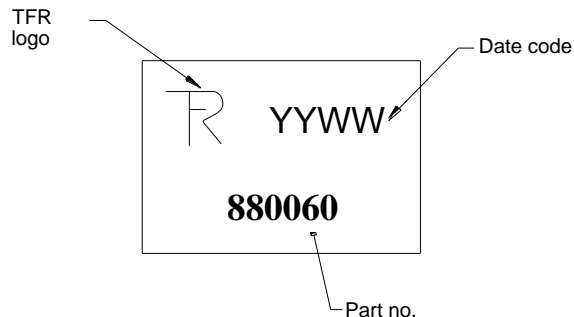

The date code consists of: YY = last digit of year,
WW = 2 digit week

Tape and Reel Information

Tape and Reel available upon request
EIA-481

Tinning available per J-STD-001

Absolute Maximum Ratings

| Parameter | Rating |
|-----------------------|----------------|
| Operating Temperature | -40 to +85 °C |
| Storage Temperature | -55 to +100 °C |
| Maximum Input Power | +23 dBm |

Operation of this device outside the parameter ranges given above may cause permanent damage.

880060

1227.6 MHz GPS L2 BAW Filter

Product Compliance Information

ESD Information



Caution! ESD-Sensitive Device

Value: Passes ≥ 8000 V min.
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

Value: Passes ≥ 1600 V min.
Test: Machine Model (MM)
Standard: JEDEC Standard JESD22-A115

Refer to [ESD Sensitivity](#) for data

Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@tqs.com

Tel: +1.407.886.8860
Fax: +1.407.886.7061

For technical questions and application information:

Email: info-defense@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.