

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761503116

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 6 Pair Right Angle Daughtercard Receptacle, Left Guided, 16 Columns, 288 Circuits, Plated Through Hole Dimension 0.46mm, Polarizing Key Position A, Lead-Free

Documents:

3D Model

Drawing (PDF)

Product Specification PS-76060-999 (PDF)


Application Specification AS-76060-990 (PDF)

Application Specification AS-76060-9999 (PDF)

Packaging Specification PK-70873-589 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76150
Application	Conventional, Coplanar, Daughtercard
Application Tooling Documents	TM-622018799
Component Type	PCB Receptacle
Electrical Model	Yes
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	887191277608
Physical	
Circuits (Loaded)	288
Circuits (maximum)	288
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	41.058/g
Number of Columns	16
Number of Pairs	6
Number of Rows	18
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-55°C to +85°C

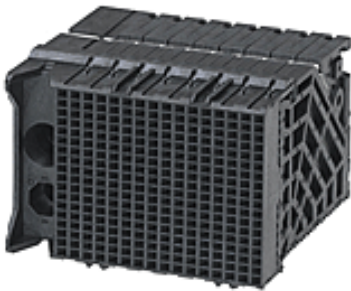

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/79/2015 (17

December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

76150 Series

Mates With

76145 Impact™ 100 Ohm Vertical

Backplane Header

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description

Product #

Daughter Card

0622018663

Signal Module

Assembly Press-In

Tool for 6-Pair by 16-

Column Assemblies

Termination Interface: Style	Through Hole - Compliant Pin	Impact Daughter Card Extraction Tool
Electrical		0622024300
Current - Maximum per Contact	0.75A	
Data Rate	25.0 Gbps	
Impedance	100#	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990, AS-76060-9999	
Electrical Model Document	EE-76150-001, EE-76560-0001	
Packaging Specification	PK-70873-589	
Product Specification	PS-76060-999	
S-Parameter Model	SP-76150-001, SP-76560-0001	
Sales Drawing	SD-76150-002	
Symbol/Footprint Data	SYM-76150-3116	

This document was generated on 06/09/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION