


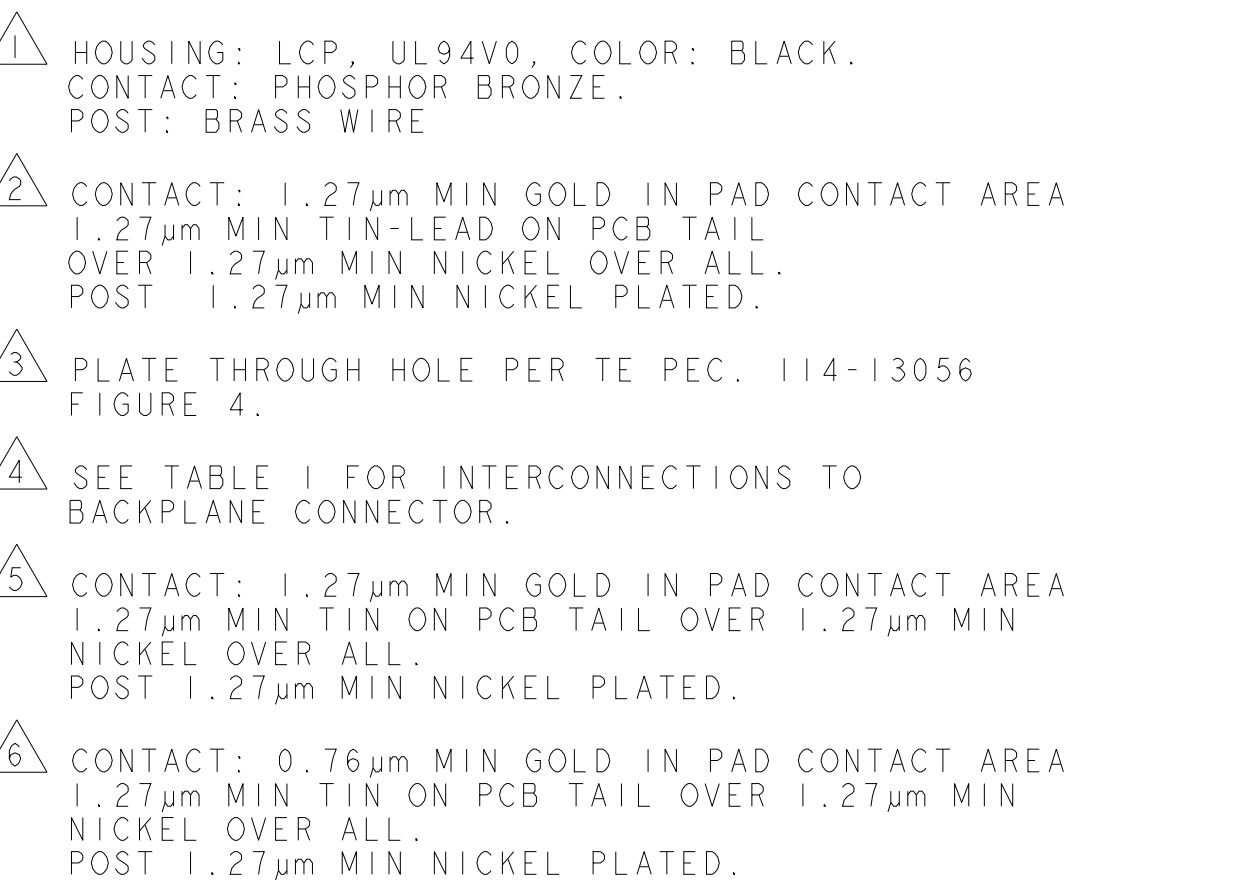


TYPICAL INTERCONNECTIONS FOR EACH COLUMN (WAFER): 2, 3		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
POWER	ax, bx, cx	ax, bx, cx, dx
POWER	ex, fx, gx	fx, gx, hx, ix
NOT CONNECTED	dx	ex

TYPICAL INTERCONNECTIONS FOR EACH COLUMN (WAFER): 4, 5, 6		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL	ax	bx
SIGNAL	bx	cx
SIGNAL	dx	ex
SIGNAL	fx	gx
SIGNAL	gx	hx
GROUND	cx, ex, (ALL COMMONED)	ax, dx, fx, ix

CONTACT USAGE	DAUGHTERCARD CONNECTOR P I N	BACKPLANE CONNECTOR P I N
SIGNAL PAIR	a x	a x
	b x	b x
SIGNAL PAIR	d x	e x
	e x	f x
SIGNAL	g x	i x
GROUNDS (ALL COMMONED)	c x, f x	c x, d x, g x, h x

CONTACT USAGE	DAUGHTERCARD CONNECTOR P I N	BACKPLANE CONNECTOR P I N
SIGNAL PAIR	b x	c x
	c x	d x
SIGNAL PAIR	e x	g x
	f x	h x
GROUND S	a x, d x, g x, (ALL COMMONED)	a x, b x, e x, f x, i x

	1410968-4
	1410968-3
	1410968-2
PLATING	PART NO

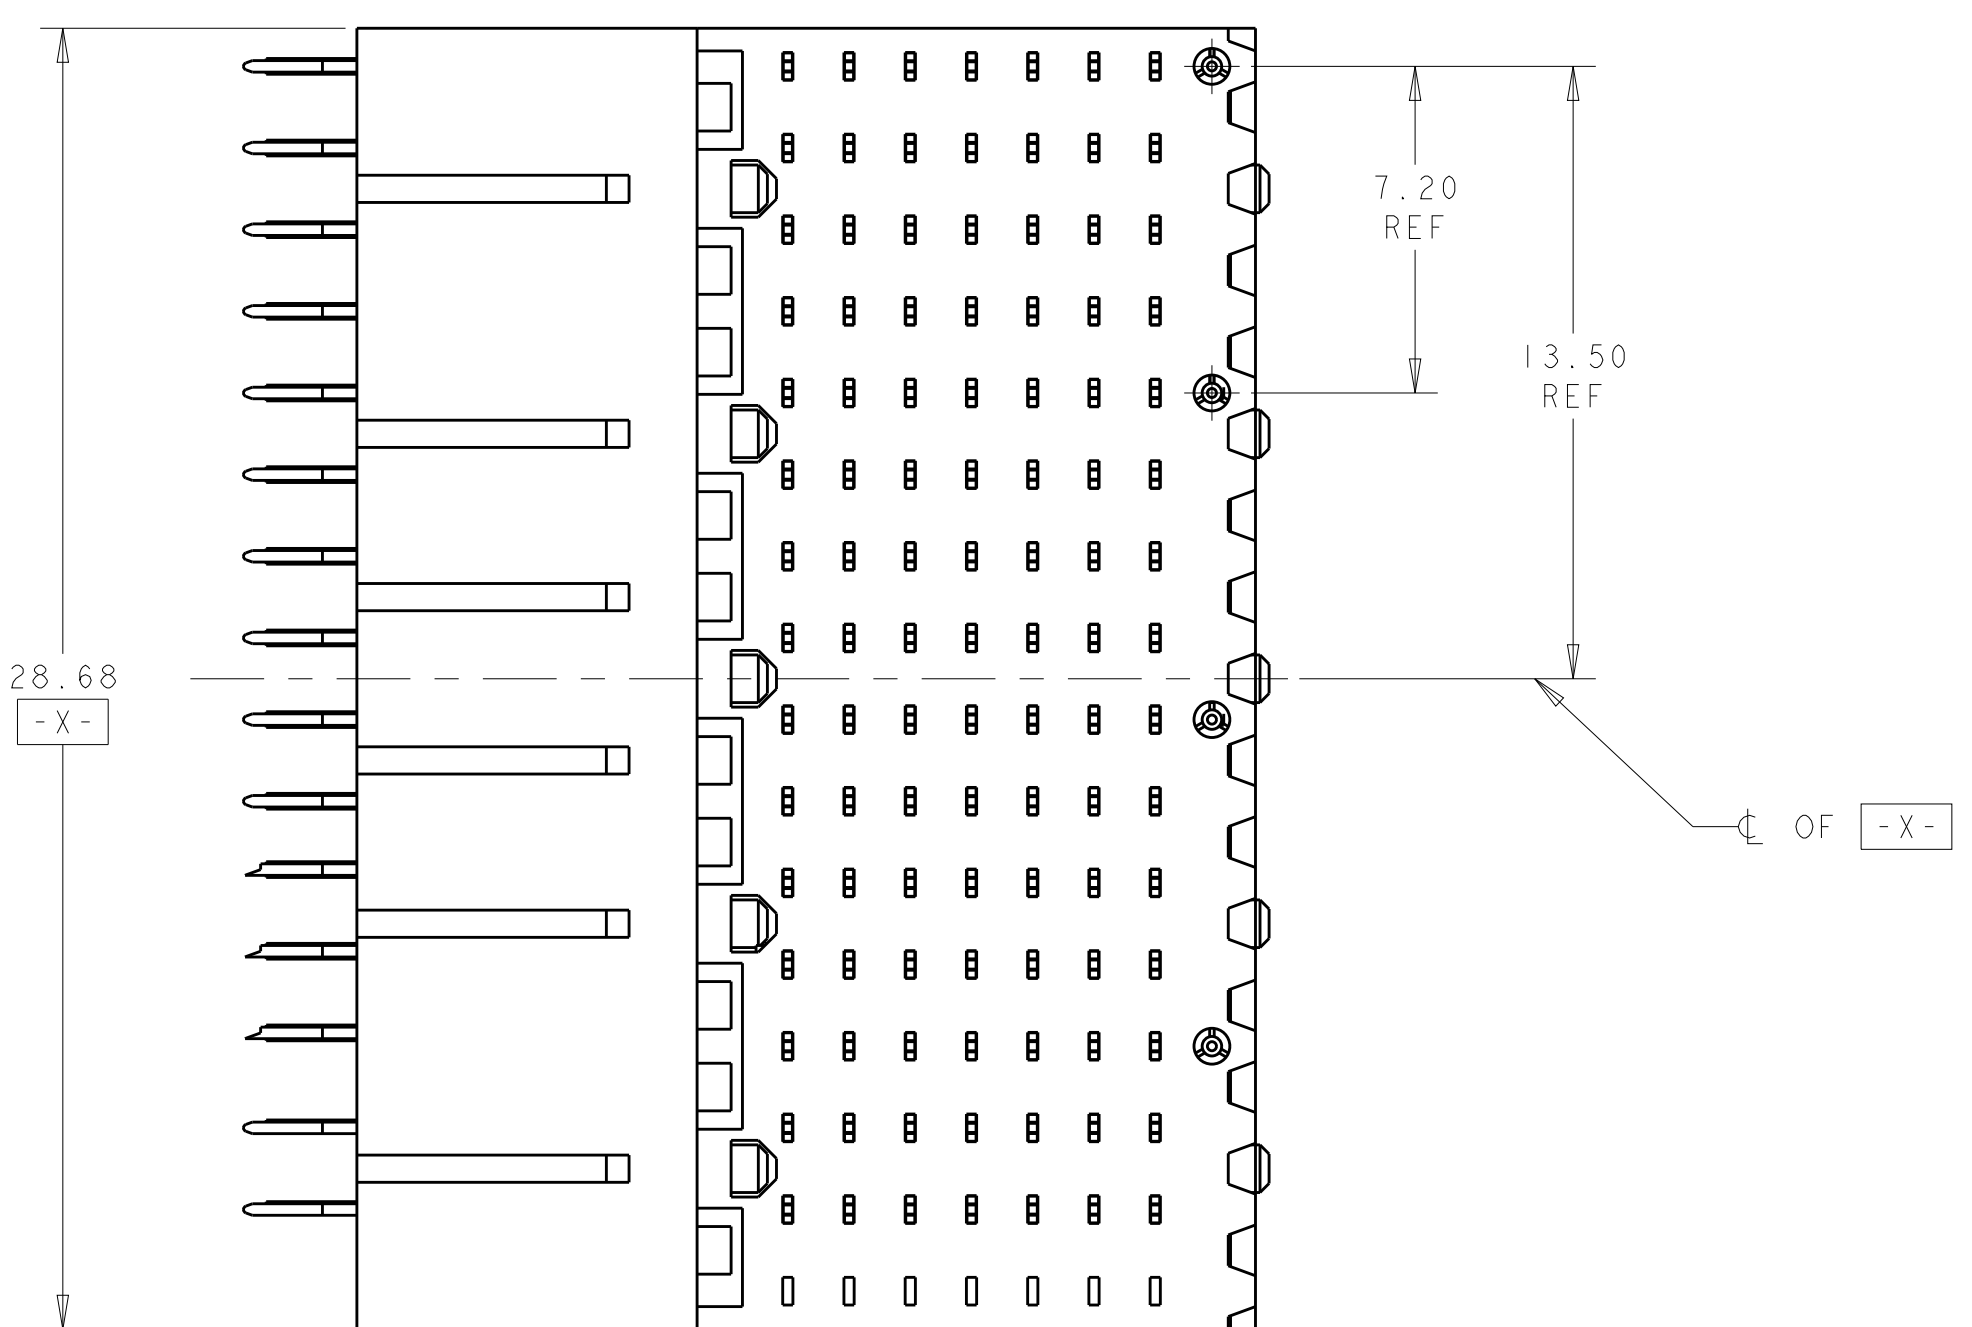

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. R_TREA 17FEB2006 CHK. G.GRIFFITH 17FEB2006 APPD. 17FEB2006		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC ±. 2 PLC ±0.5 3 PLC ±0.13 4 PLC ±. ANGLES ±1°		NAME RIGHT-ANGLE PLUG ASSEMBLY, 7 ROW, CENTER, 20.3mm, MultiGig RT2, DAUGHTERCARD CONNECTOR, COMBO	
		PRODUCT SPEC 108-2072 APPLICATION SPEC 114-13056		SIZE CAGE CODE DRAWING NO. RESTRICTED TO A100779C1410968	
MATERIAL FINISH  SEE TABLE		WEIGHT -		SCALE 6:1 SHEET 1 OF 1 REV F	
CUSTOMER DRAWING					