

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

78215-1044

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 5 Pair, Right Angle Power Header, Press-Fit, Blade A1 & A2 Length 6.90mm, B1 & B2 Length 5.70mm, LCP, Glass Filled, UL94-V0, Black, Tray Packaging, Lead-Free


Documents:

3D Model

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	78215
Application	Conventional, Coplanar
Application Tooling Documents	TM-622018799
Component Type	Power Header
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	884982135895
Physical	
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	Yes
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	11.939/g
Number of Columns	N/A
Number of Pairs	5
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	5.20mm
Pitch - Termination Interface	2.00mm, 3.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +85°C

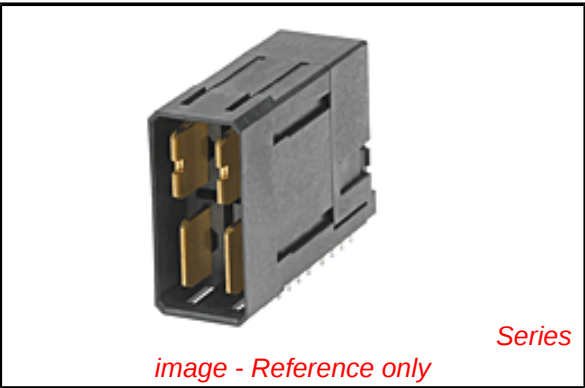

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

78215Series

Mates With

78216 Impact™ Vertical Receptacle, 78352 Right Angle Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Press-In Tool for Power Module Assembly	0622018668
Impact™ Power Module Right Angle Removal Tool	0622024500

Termination Interface: Style

Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact

25.0A

Data Rate

N/A

Shield Type

N/A

Shielded

No

Voltage - Maximum

250V

Material Info

Reference - Drawing Numbers

Sales Drawing

SD-78215-002

Symbol/Footprint Data

SYM-78215-1044

This document was generated on 05/14/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION