

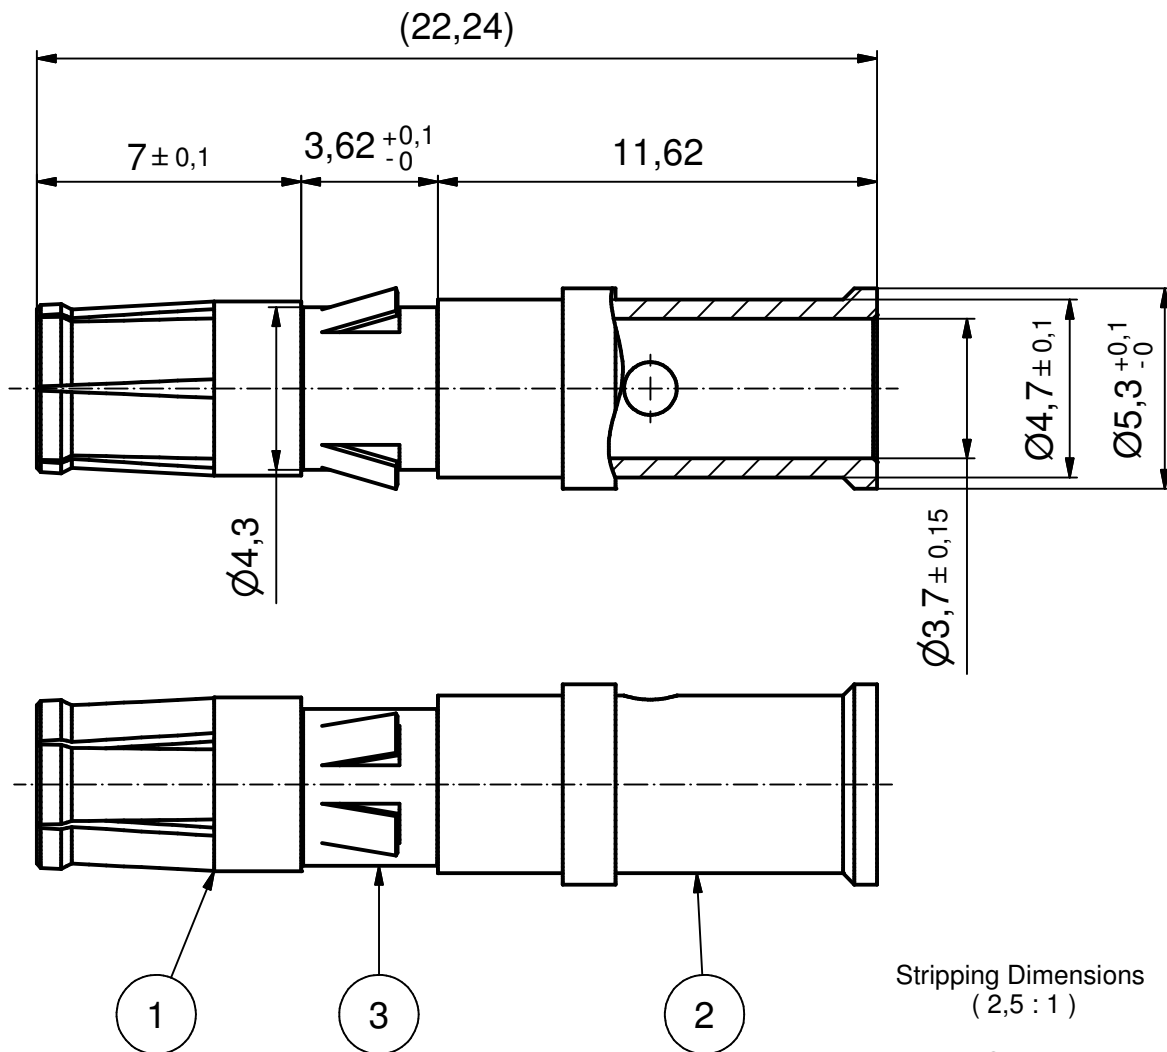


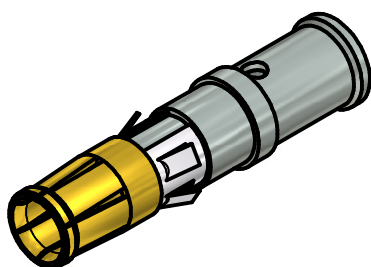

Stripping Dimensions
(2,5 : 1)



NOTES:

1. MATERIAL:
ITEM 1 + 2: COPPER ALLOY
ITEM 3: STAINLESS STEEL
2. PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
3. CRIMPING: USE CRIMP TOOL 360X10409X
WITH TOOL INSERT 360X20029X
SELECTOR SETTINGS: 7 FOR AWG 10
6 FOR AWG 12

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm
rev.	description	date	name	drawn	date	
a	Original			appd.	13.12.13	Koch
				norm		
				d-old	SK0521Z5	

scale:	5:1 (3:1)		
material:	see notes		
title:			
HIGH POWER CONTACT FEMALE			
CRIMP VERSION 30A FOR AWG 10-12			
dwg no:			DIN-
17K1A432			A4
			sh: 1
part no:			17-400243