

CLL914

**SURFACE MOUNT
HIGH SPEED SILICON
SWITCHING DIODE**



SOD-80 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL914 type is an ultra-high speed silicon switching diode manufactured by the epitaxial planar process, in a hermetically sealed glass surface mount package, designed for high speed switching applications.

MARKING: CATHODE BAND

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Continuous Reverse Voltage
Peak Repetitive Reverse Voltage
Continuous Forward Current
Peak Repetitive Forward Current
Peak Forward Surge Current, $t_p=1.0\mu\text{s}$
Peak Forward Surge Current, $t_p=1.0\text{s}$
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

V_R 75
 V_{RRM} 100
 I_F 250
 I_{FRM} 250
 I_{FSM} 4.0
 I_{FSM} 1.0
 P_D 500
 T_J, T_{stg} -65 to +200
 θ_{JA} 350

UNITS

V
V
mA
mA
A
A
mW
 $^\circ\text{C}$
 $^\circ\text{C/W}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	$V_R=20\text{V}$		25	nA
I_R	$V_R=75\text{V}$		5.0	μA
BV_R	$I_R=100\mu\text{A}$	100		V
V_F	$I_F=10\text{mA}$		1.0	V
C_T	$V_R=0, f=1\text{ MHz}$		4.0	pF
t_{rr}	$I_R=I_F=10\text{mA}, R_L=100\Omega, \text{Rec. to } 1.0\text{mA}$		4.0	ns

CLL914
 SURFACE MOUNT
 HIGH SPEED SILICON
 SWITCHING DIODE



SOD-80 CASE - MECHANICAL OUTLINE

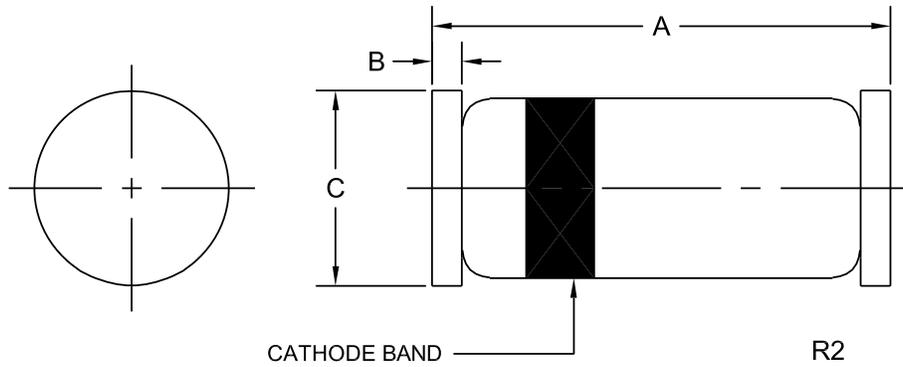

MARKING: CATHODE BAND

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.014		0.35	
C (DIA)	0.049	0.067	1.25	1.70

SOD-80 (REV:R2)

R3 (8-January 2010)