


PRODUCT NUMBER

10132952-000XXLF

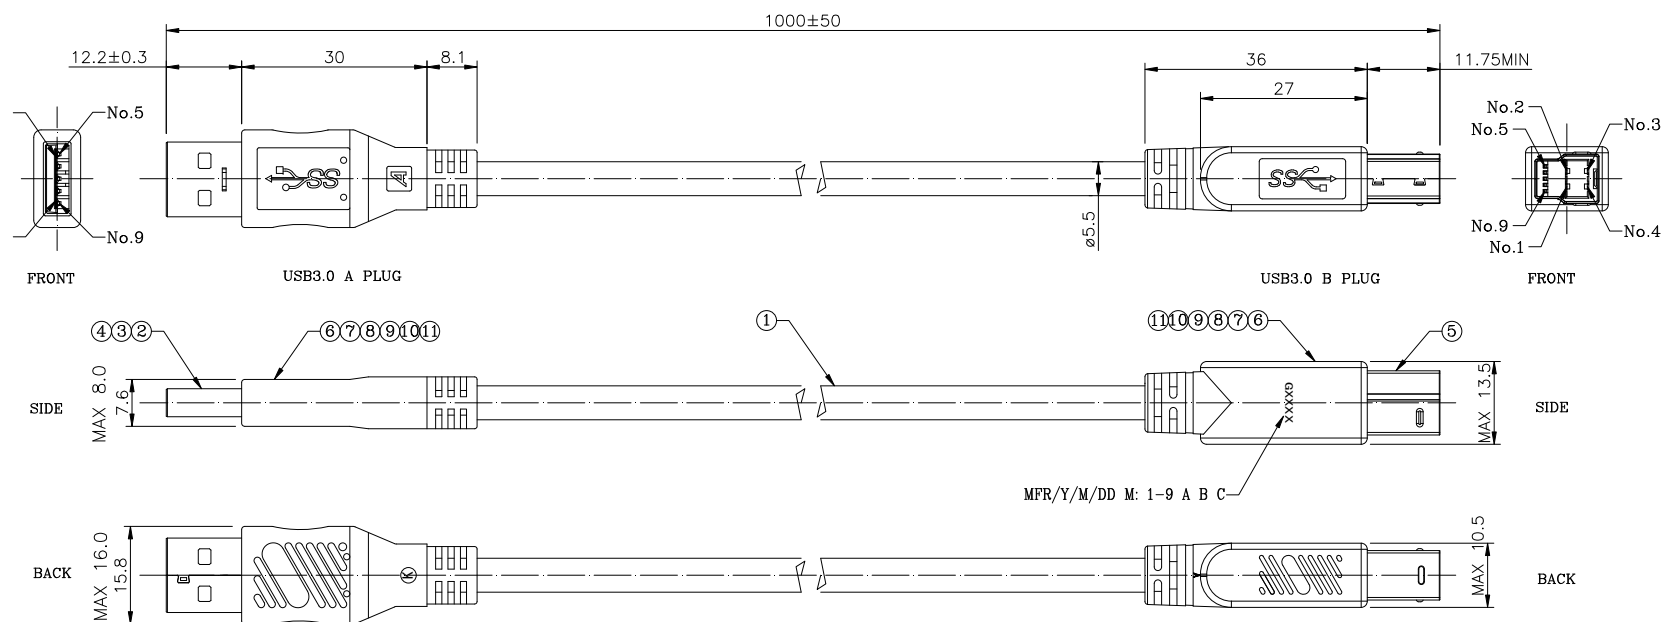

CONNECTIONS		
USB 3.0 A/M	CABLE COLOUR	USB 3.0 B/M
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	D.W	7
8	VIOLET	8
9	ORANGE	9
SHELL	Braid+Drain	SHELL

NOTE:

1. PRODUCT SPECIFICATION: GS-12-1285.
2. PACKAGE SPECIFICATION: SEE PAGE 2.
3. PART NUMBER:
10132952-000 X X L F

PLATING:

1: G/F ON CONTACT
2: 30u" Au ON CONTACT

PACKAGE:

1: PE BAG



12	CABLE TIE	L=120mm (Black)	1 pcs
11	COPPER TAPE	Copper Alloy	2 pcs
10	OVER MOLD	PVC, Black	
9	INNER MOLD	PE	
8	LEAD FREE SOLDER		
7	TUBE	#6 Black	18mm
6	TUBE	#1 Black	10mm
5	USB 3.0 B PLUG	HSG: High Temp. Thermoplastic, Blue; Terminal: Copper Alloy, Optional Gold Plating; Shell: Steel, Ni Plated	1 set
4	USB 3.0 A PLUG LOWER SHELL	Steel, Ni Plated	1 pcs
3	USB 3.0 A PLUG UPPER SHELL	Steel, Ni Plated	1 pcs
2	USB 3.0 A PLUG	HSG: High Temp. Thermoplastic, Blue Terminal: Copper Alloy, Optional Gold Plating	1 pcs
1	CABLE	UL 20276 for USB 3.0, BLACK, OD=5.5mm	
No.	PARTS NAME	SPECIFICATION	QTY

mat'l. code				surface ☒		tolerance		projection		product family USB 3.0			
ltr		ecn no		dr		date		tolerances unless otherwise specified				title	
A				TAI		2014-12-30		angles		linear		16<L≤63 ±0.4	
												4<L≤16 ±0.3	
												L≤4 ±0.2	
								X°±5°				MM	
										scale		CABLE ASS'Y, USB 3.0 A PLUG TO USB 3.0 B PLUG	
								dr		KENNY TAI		2014-11-27	
								engr		KENNY TAI		2014-11-27	
								chr		KENNY TAI		2014-11-27	
								appd		PM ZHENG		2014-12-30	
												FCI	
												dwg no	
												sheet 1 of 2	
												10132952	
												A4	
												type	
												CUSTOMER Drawing	
sheet index		revision sheet		A		A							
				1		2							



PRODUCT NUMBER


10132952-000XXLF

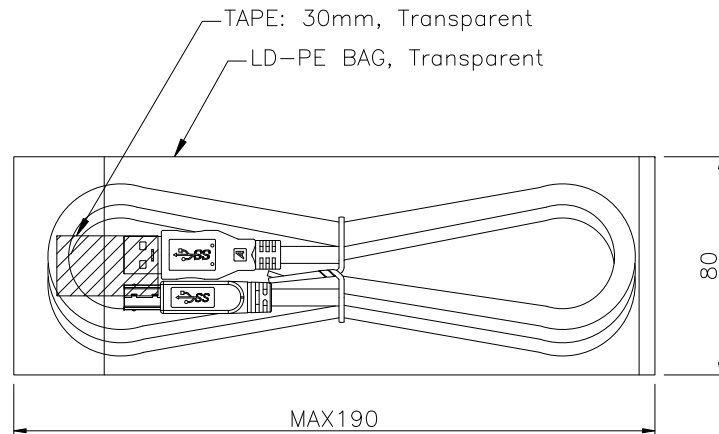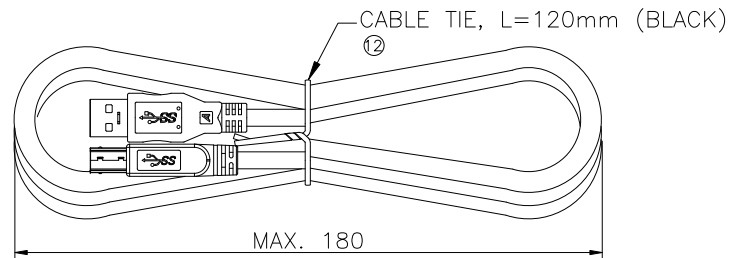

NOTE:

1. PUT 4 DESICCANTS INTO THE PLASTIC BAG.
2. PACKAGE Q'TY:

PE BAG	CARTON	Net Wt.	Gross Wt.
1 CABLE	250 CABLES	12.8 Kg	14.3 Kg

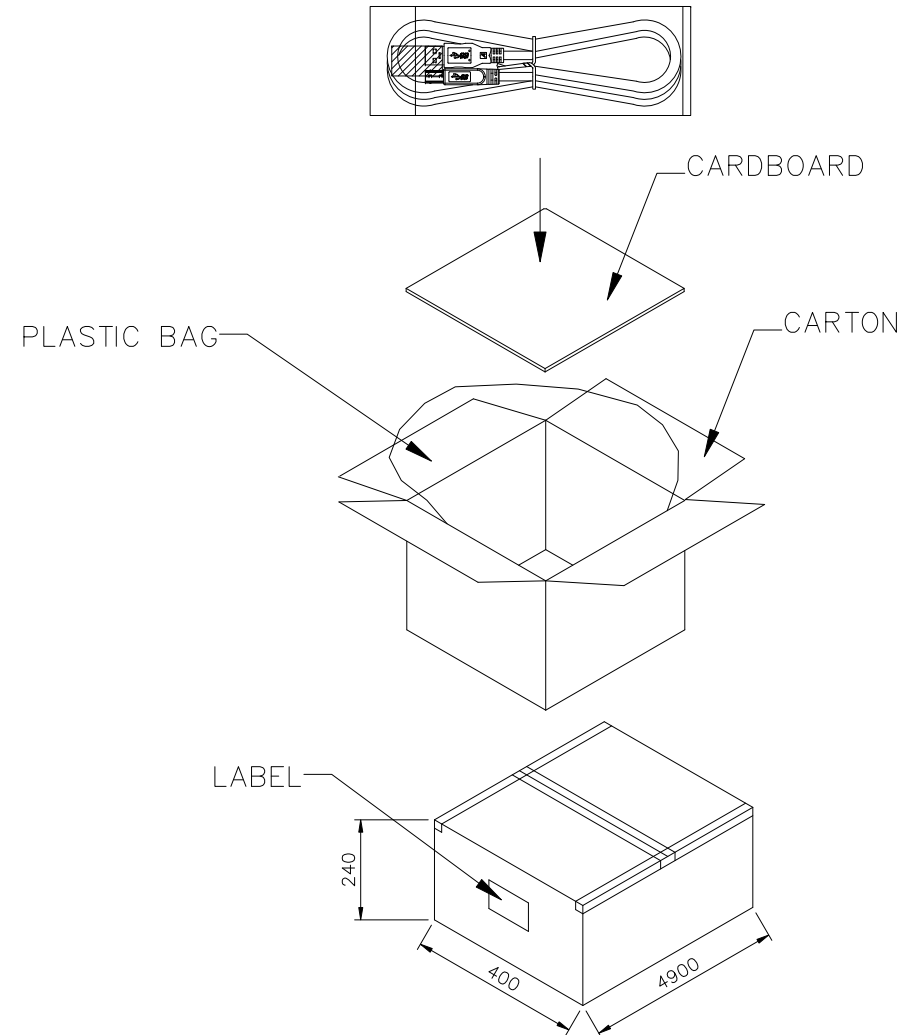

mat'l. code					surface 		tolerance		projection 		product family USB 3.0																	
ltr		ecn		no	dr	date		tolerances unless otherwise specified						title CABLE ASS'Y, USB 3.0 A PLUG TO USB 3.0 B PLUG														
								angles		linear		16<L≤63 ±0.4																
												4<L≤16 ±0.3																
								X°±5°				L≤4 ±0.2																
								dr		KENNY TAI		2014-11-27				dwg no				sheet 2 of 2				size				
								engr		KENNY TAI		2014-11-27				10132952				A4								
								chr		KENNY TAI		2014-11-27																
								appd		PM ZHENG		2014-12-30																
sheet index		revision sheet		A	A												type		CUSTOMER Drawing									
				1	2																							