



MATERIAL NO.	ENGINEERING NO.	LENGTH	POLES
1206142001	LW04000K03M020	78.7 (2M)	4
1206142002	LW05000K03M020	78.7 (2M)	5

NOTICE: THIS PART IS CSA AND FACTORY MUTUAL APPROVED
NO CHANGES CAN BE MADE TO THE ASSEMBLY, COMPONENTS
OR SUPPLIER WITHOUT PRIOR APPROVAL FROM CSA AND
FACTORY MUTUAL.

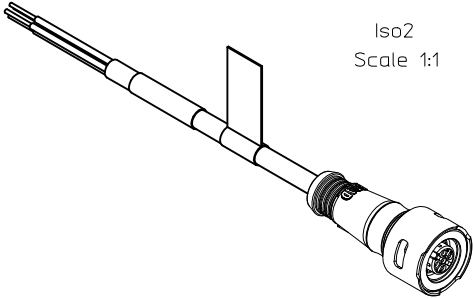

Iso2
Scale 1:1

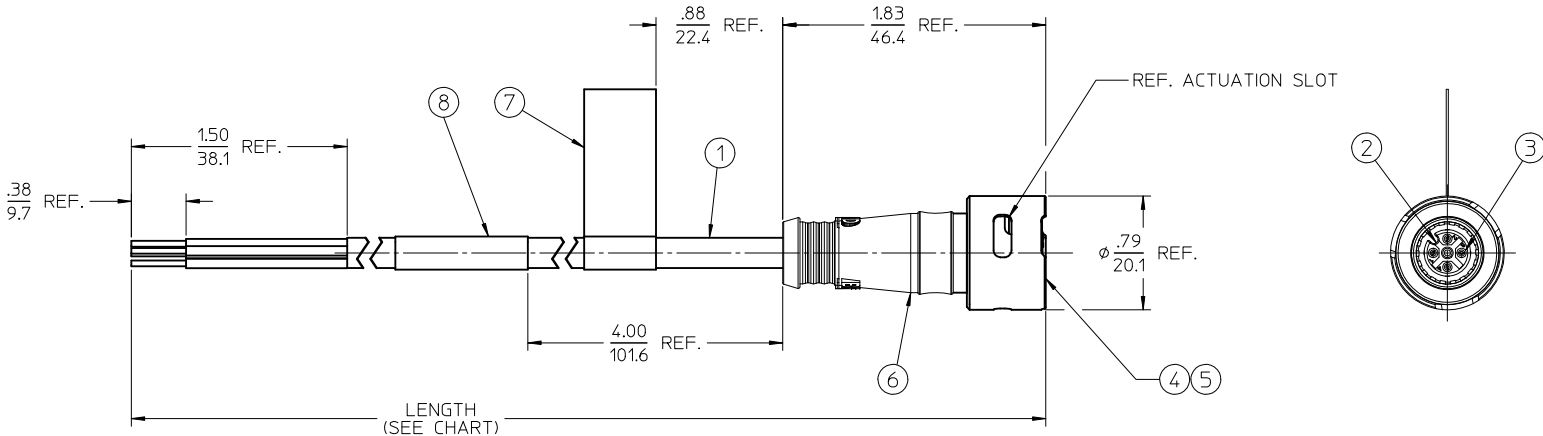

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPECIFICATIONS: PS-120614-001
 4. CONTROL DOC: ES-120614-001
 5. 3 & 4 POLE ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 125V
CURRENT RATING: 4 AMPS
 6. 5 POLE ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 32V
CURRENT RATING: 4 AMPS

8	1	WRAP LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	FLAG LABEL (WARNING)	POLYESTER	BLACK/ORANGE
6	1	OVERMOLD	TPE	YELLOW
5	1	OUTER SLEEVE	ST. STEEL	PASSIVATED
4	1	INNER SLEEVE	ST. STEEL	PASSIVATED
3	XX	CONTACT	Cu ALLOY	GOLD PLATED
2	1	INSERT	PUR	BLACK
1	1	CABLE, #18 AWG ITC/PLTC	TPE	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED	EC NO: WNA2012-0225	2011/11/21
DRWNR:STONE	2012/01/27	
CHKD:L.HARTMANN	2012/04/18	
APPR:JFMURPHY		
REV	DESCRIPTION	DATE
A		

QUALITY
SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)			
	mm	INCH	
4 PLACES	± .---	± .---	
3 PLACES	± .---	± .---	
2 PLACES	± .---	± .01	
1 PLACE	± 0.3	± .---	
ANGULAR ± 2 °			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			

FEMALE FACE VIEW		
3 POLE 1 BROWN 2 NOT USED 3 BLUE 4 BLACK 5 NOT USED	4 POLE 1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 NOT USED	5 POLE 1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GRAY
DIMENSION STYLE: IN/MM SCALE: 1.5:1 DESIGN UNITS: INCH THIRD ANGLE PROJECTION TITLE: ULTRA-LOCK ZONE 2 FEMALE, STRAIGHT K03, 18 AWG, TPE MOLEX INCORPORATED DOCUMENT NO. SD-120614-011 SHEET NO. 1 OF 1 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		