


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without the prior consent, and that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ZONE	DESCRIPTION	DATE	APPROVED
A	ECN#HK643	RELEASE DRAWING	12/29/93	Y.M.LEE
B		CHANGE PER ECN#HK650	1/06/94	Y.M.LEE

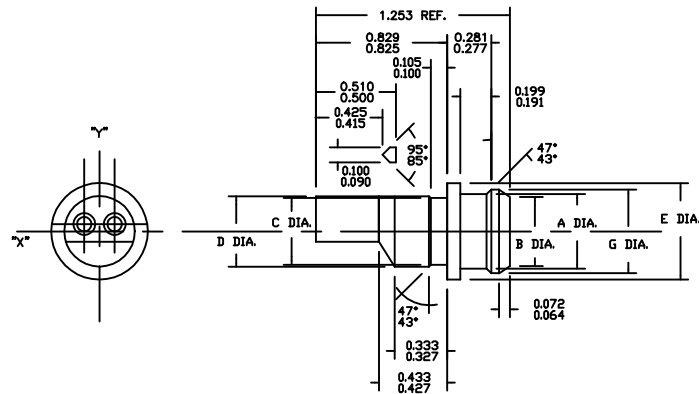

PART NUMBER BREAKDOWN

44-103-100XX

NO. OF POCKETS

PLUG

CLASS OF PRODUCT

MATERIALS

Insulator Body : Thermal Plastic Rubber Santoprene 101-73

Receptacle Contact : Phosphor Bronze

Contact Plating : 0.0001" to 0.0003" Tin Plating

SPECIFICATIONS

Voltage Rating : Limiting Operating Voltage At Sea Level,

250 Volts AC RMS

Current Rating : 8 AMPS Continuous

Temperature Range : Continuous Operation From -40°C To +125°C


Wire Size : 14 , 16 & 18 AWG

Overall Wire Insulation Diameter : 0.080 To 0.130 inches.


(2.03 To 3.30 mm)

Insulation Resistance : 5,000 Megaohms Min.


Dielectric Withstanding Voltage : 1000 VRMS




-10001




-10002




-10003



-10004




-10005



-10006

CUSTOMER INFORMATION DRAWING

PART NUMBER	NUMBER OF POCKETS (REF)	A DIA.	B DIA.	C DIA.	D DIA.	E DIA.	F DIA.	G DIA.	H DIA.
44-103-10001	1	.443/.437	.428/.422	.346/.340	.375/.369	.500/.494	-	-	.395/.389
44-103-10002	2	.473/.467	.440/.432	.425/.419	.446/.440	.610/.604	.068/.062	.530/.524	-
44-103-10003	3	.574/.568	.541/.533	.517/.511	.538/.532	.711/.705	.085/.079	.631/.625	-
44-103-10004	4	.685/.679	.650/.644	.615/.609	.636/.630	.822/.816	.104/.098	.742/.736	-
44-103-10005	5	.685/.679	.650/.644	.615/.609	.636/.630	.822/.816	.104/.098	.742/.736	-
44-103-10006	6	.799/.793	.764/.758	.729/.723	.750/.744	.936/.930	.102/.099	.856/.850	-

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC		APPROVAL DATE	Amphenol East Asia Limited Manufacturing Operation
X +/-		DRAWN MAN WONG 11/23/93	
XX +/-		CHECKED Y. M. LEE 1/06/94	
XXX +/-		APPR.	
FRACTIONS +/-		APPR.	TITLE PLUG CONNECTOR MINIATURE, 1 THRU 6 CONTACT
ANGLES +/-		APPR.	
FOR MATERIALS AND FINISHES SEE NOTES		APPR.	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	
DIMENSIONS			SIZE DRAWING NO. B C44-103-100XX REV. B
U.S. INCHES			
-(METRIC)- -(MM)-			
		SCALE NONE	SHEET 1 OF 1