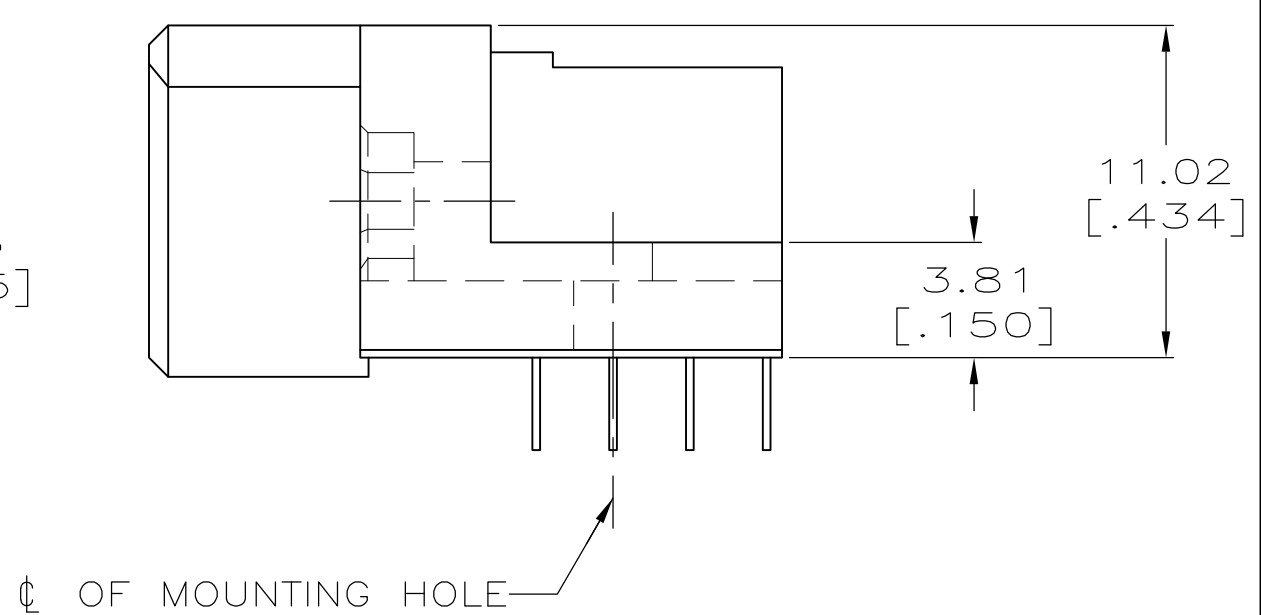


4805 (1/15)

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—NATURAL.

2

CONTACT MATERIAL: COPPER ALLOY.

3

FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108—9063; BASED ON TELCORDIA DR—1217—CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
SOLDER TAILS AREA: TIN—LEAD PLATED.

4

SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.

5

DIMENSIONS IN BRACKETS ARE IN INCHES.

6

PART NUMBER IS OBSOLETE.

7

QUANTITIES OF VOID CORING ARE DEPENDENT ON THE POSITION SIZE OF THE HOUSING.

8

NO CONTACT LUBRICANT

9

AMP, PART NUMBER, AND DATE CODE

10

OEFD0—983—9000—048, REV A, 00779 AND DATE CODE, ONLY FOR PART NUMBER 3—532903—6

11

PART NUMBER IS FOR ROCKWELL COLLINS.

12

FINISH:
CONTACT FINISH: .00127—.00254 [.000050—.000100] NICKEL UNDERPLATE ALL OVER; .000762 [.000030] GOLD PLATE IN CONTACT AREA, TIN—LEAD PLATED POSTS.

12	111.76 [4.400]	44	114.91 [4.524]	125.73 [4.950]	133.35 [5.250]	180	4—532903—6
11	73.66 [2.900]	29	76.81 [3.024]	87.63 [3.450]	95.25 [3.750]	120	3—532903—6
10							3—532903—5
9							3—532903—4
8	210.82 [8.300]	83	213.97 [8.424]	224.79 [8.850]	232.41 [9.150]	336	1—532903—4
7	35.56 [1.400]	14	38.71 [1.524]	49.53 [1.950]	57.15 [2.250]	60	1—532903—3
6	73.66 [2.900]	29	76.81 [3.024]	87.63 [3.450]	95.25 [3.750]	120	1—532903—2
5	175.26 [6.900]	69	178.41 [7.024]	189.23 [7.450]	196.85 [7.750]	280	1—532903—1
4	162.56 [6.400]	64	165.71 [6.524]	176.53 [6.950]	184.15 [7.250]	260	1—532903—0
3	149.86 [5.900]	59	153.01 [6.024]	163.83 [6.450]	171.45 [6.750]	240	532903—9
2	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	220	532903—8
1	124.46 [4.900]	49	127.61 [5.024]	138.43 [5.450]	146.05 [5.750]	200	532903—7
	111.76 [4.400]	44	114.91 [4.524]	125.73 [4.950]	133.35 [5.250]	180	532903—6
	99.06 [3.900]	39	102.21 [4.024]	113.03 [4.450]	120.65 [4.750]	160	532903—5
	86.36 [3.400]	34	89.51 [3.524]	100.33 [3.950]	107.95 [4.250]	140	532903—4
	78.74 [3.100]	31	81.89 [3.224]	92.71 [3.650]	100.33 [3.950]	128	532903—3
	60.96 [2.400]	24	64.11 [2.524]	74.93 [2.950]	82.55 [3.250]	100	532903—2
	187.96 [7.400]	74	191.11 [7.524]	201.93 [7.950]	209.55 [8.250]	300	532903—1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

0 PLG ± -

1 PLG ± -

2 PLG ± -

3 PLG ± 0.13 [.005]

4 PLG ± -

ANGLES ± -

FINISH

3

12

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD

06/18/90
2/17/92

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 0

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

TE Connectivity

HOI, 4 ROW, RECEPTACLE ASSEMBLY,
3.05 [.120] LONG SOLDER TAILS

—

A100779532903

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV V

4805 (1/15)