


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₁	REVISED	11/19/86	<i>[Signature]</i>

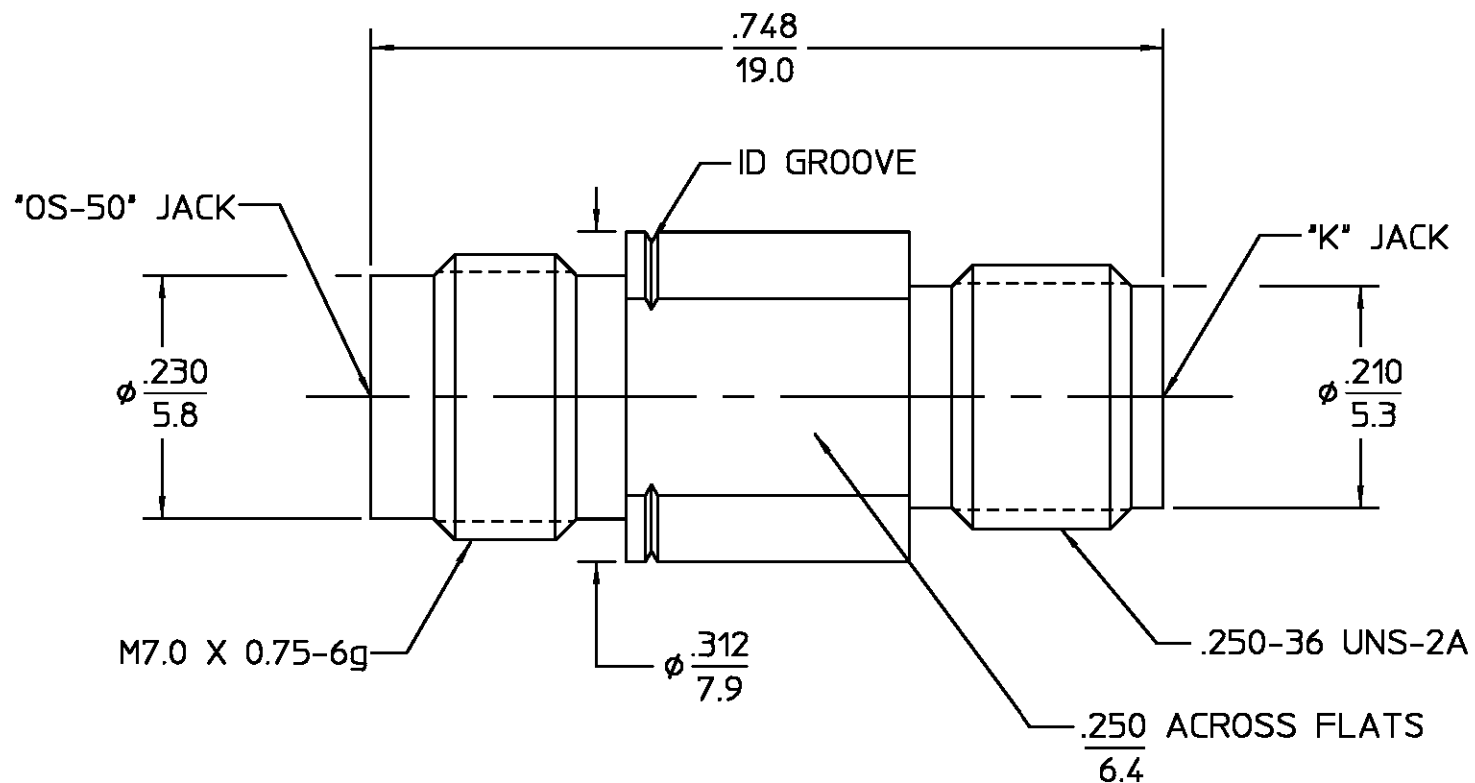

HOUSING INNER SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1°	DRAWN BY DAC	DATE 11/10/88
	CHECKED BY DAC	11/23/88
	APPR. BY AW	11/28/88
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASSY PROCEDURE	TITLE OS-50 JACK TO OS 2.9 JACK
	NO. A.P. N/A	SIZE B CODE IDENT NO. 26805 8580-2361-02 REV 01 ₁
		SCALE 6:1 SHEET 1 OF 1

NOTES:
1. CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm (REF)