

H

DIP

components
herals
ontrol,

Solderability: Wave soldering 260°/10 s.

SMT are reflow compatible according to C&K lead free specification for SMT components PS-LF-001.

RTE Series

Low Profile Rotary DIP Switches

H

DIP


SWITCHES WITH STANDARD OPTIONS

PC Mount-Terminal Option N



PART NUMBER WITHOUT ESD PIN	WITH ESD PIN	NO. POS.	FUNCTION	QTY PER TUBE
RTE0400N04	RTE0410N04	4	SP4T	65
RTE1000N14	RTE1010N14	10	BCD	65
RTE1600N44	RTE1610N44	16	HEXADECIMAL	65

Right Angle Mount-Terminal Option V



PART NUMBER	NO. POS.	FUNCTION	QUANTITY
RTE0400V04	4	SP4T	150 per box
RTE1000V14	10	BCD	150 per box
RTE1600V44	16	HEXADECIMAL	150 per box


Surface Mount-Terminal Option G




PART NUMBER	NO. POS.	FUNCTION	QUANTITY PER REEL
RTE0400G04	04	SP4T	1250
RTE1000G14	10	BCD	1250
RTE1600G44	16	HEXADECIMAL	1250

NUMBER OF POSITIONS


RTE04 4 POSITION



RTE10 10 POSITION



RTE16 16 POSITION




Dimensions are shown: Inch (mm)
 Specifications and dimensions subject to change

RTE Series Low Profile Rotary DIP Switches


ESD PROTECTION



0 WITHOUT

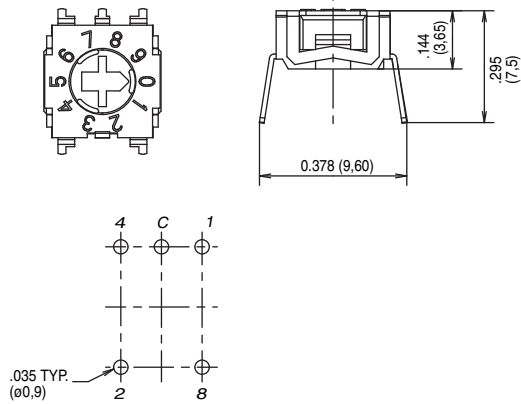

1 WITH

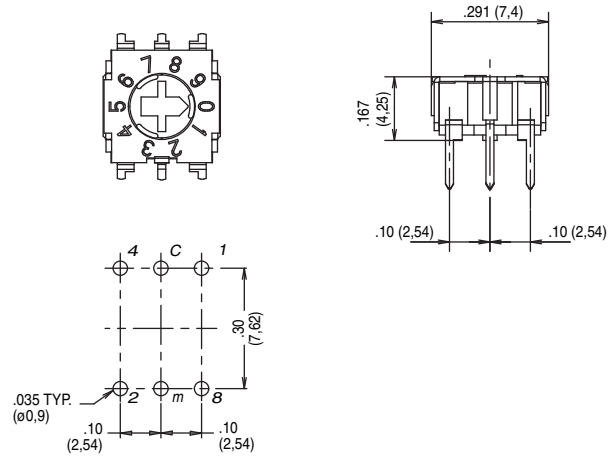


H
DIP


ACTUATOR




0 FLUSH, SCREWDRIVER SLOT



1 EXTENDED SHAFT (not available in surface mount)

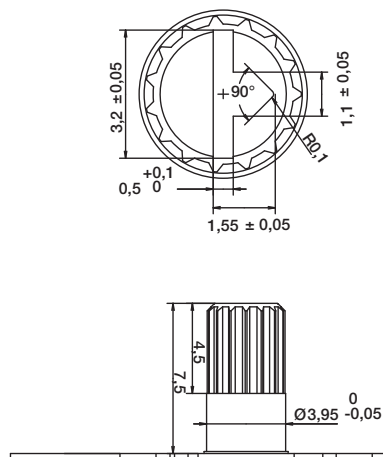

2 SHAFT FOR BUTTON

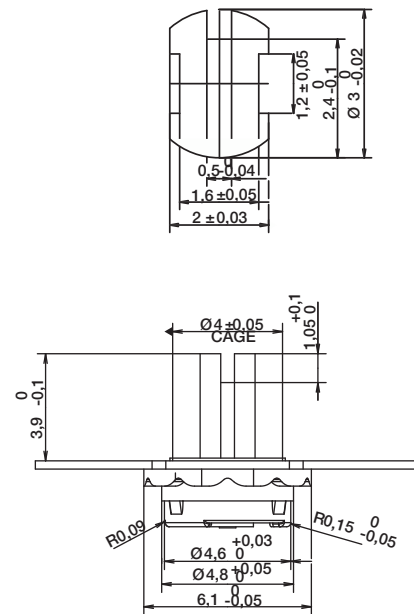

111

Without ground terminal

Without ground terminal

0.1
(2,54)

0.1
(2,54)

0.4
(10,16)


0.035
(0,9)

www.ck-components.com

RTE Series Low Profile Rotary DIP Switches

TERMINATIONS

M OPTION

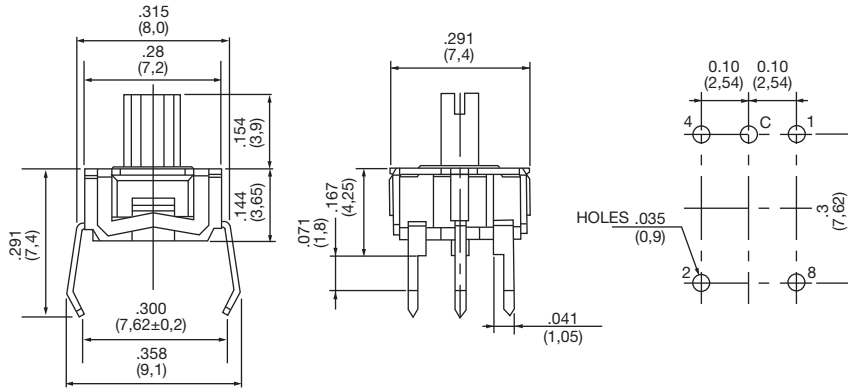

H

DIP

SWITCH FUNCTION

0 SINGLE POLE

POS.	1	2	3	4
C	●	●	●	●
1	●			
2		●		
3			●	
4				●

1 BCD CODE

POS.	0	1	2	3	4	5	6	7	8	9
C	●	●	●	●	●	●	●	●	●	●
1		●				●				●
2			●				●			
4				●	●	●				
8								●	●	

2 BCD COMPLEMENT CODE

POS.	0	1	2	3	4	5	6	7	8	9
C	●	●	●	●	●	●	●	●	●	●
1	●				●					●
2		●				●				
4	●	●	●						●	●
8	●	●	●	●	●	●	●	●		

Other codes available by request.

3 GREY CODE (for RTE10 only)

POS.	0	1	2	3	4	5	6	7	8	9
C	●	●	●	●	●	●	●	●	●	●
1		●	●			●	●			●
2			●	●	●	●				
4				●	●	●	●	●	●	●
8									●	●

4 HEXADECIMAL CODE

POS.	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1		●		●		●		●		●		●		●		●
2			●	●			●			●			●			●
4				●	●	●	●				●	●	●	●		
8								●	●	●	●	●	●	●	●	●

7 GREY CODE (for RTE04 only)

POS.	1	2	3	4
C	●	●	●	●
1	●			
2		●		
4			●	
8				●

(for RTE16 only)

POS.	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1	●		●			●			●		●		●		●	
2		●	●	●	●			●			●	●	●	●		
4				●	●	●	●		●	●	●	●				
8								●	●	●	●	●	●	●	●	●

CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT	RoHS COMPATIBLE	CONTACT MATERIAL	TERMINAL PLATING
4	YES	YES	GOLD	LEAD FREE TIN



Third Angle
Projection



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change




RTE Series

Low Profile Rotary DIP Switches

BUTTONS AVAILABLE


Buttons are ordered separately, shipped in bulk.

Part Number	Color
BTN RTE 40	Red
BTN RTE 50	Green
BTN RTE 90	Black

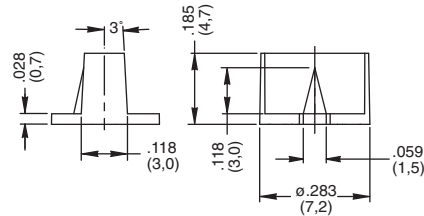


TAPE AND REEL

Tape and reel for RTExx02Gxx
750 pieces per reel.

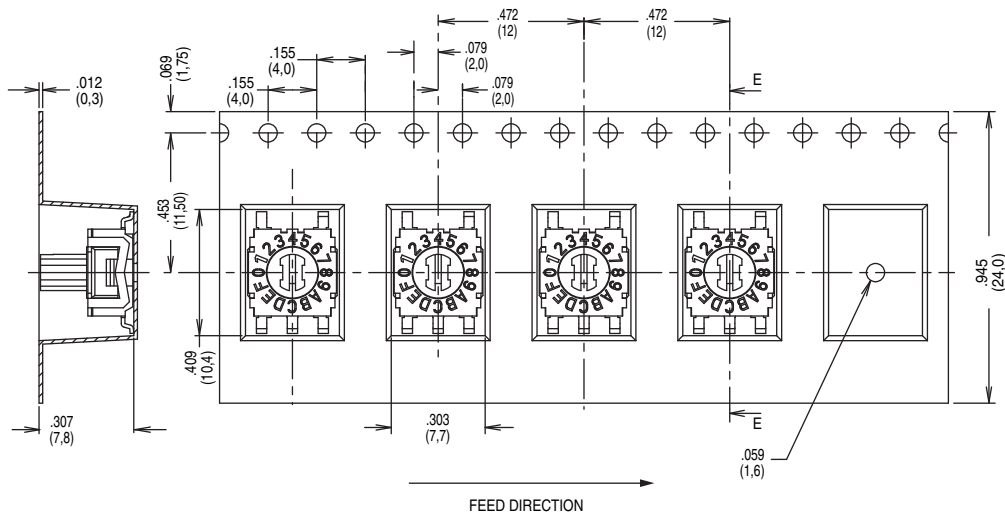

Tape and reel for RTExx00Gxx
1,250 pieces per reel.

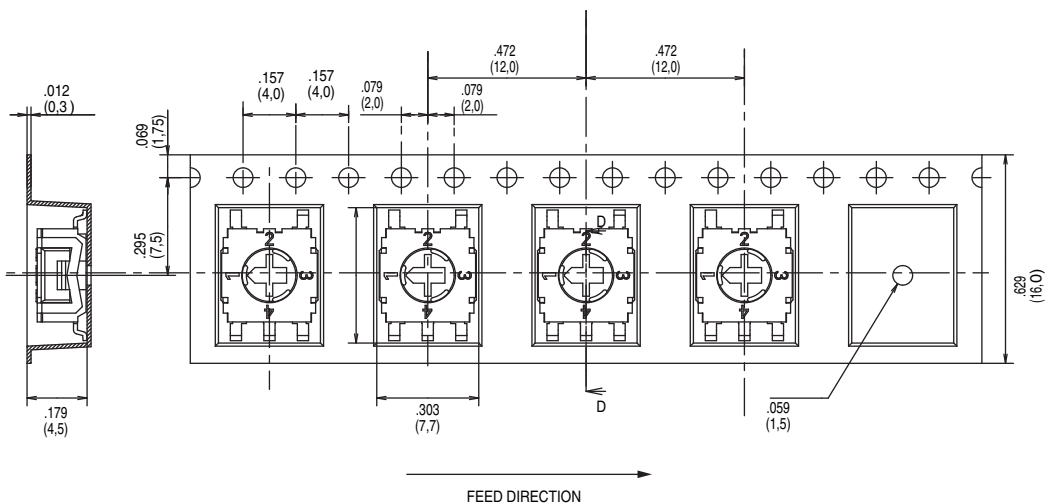

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

