
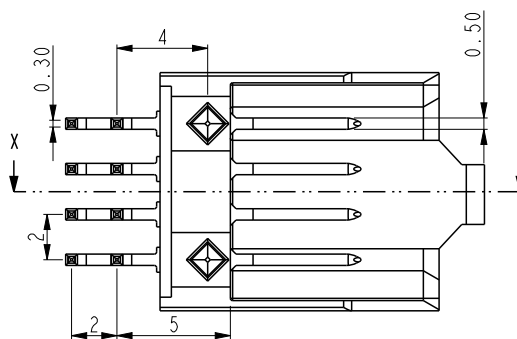
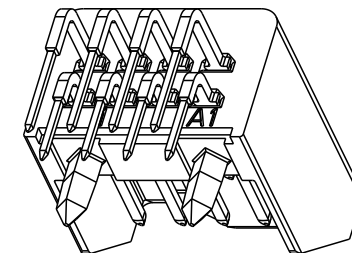

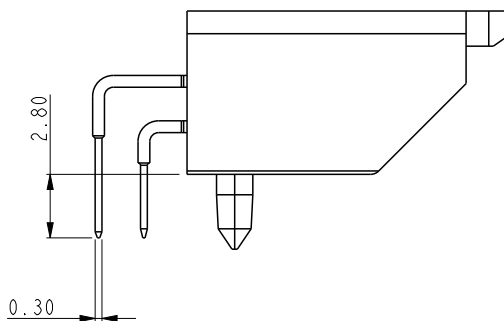


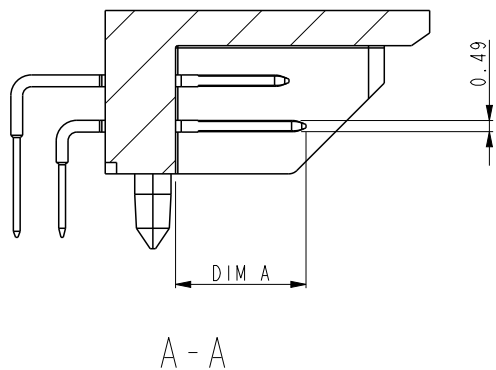

NOTE:

1. MATERIAL:

A. HEADER HOUSING: LIQUID CRYSTAL POLYMER 30%
GLASS FLAME RETARDANT ACC. UL 94-V0.

B. TERMINAL: TINBRONZE

2. MARKING ACCORDING TO DRAWING 59550.

3. FOR MORE DETAILS REFER THE DRAWING 72860_C
(2 X 4 SIGNAL SOFIX BOARD CONNECTOR)

4.ROHS INFORMATION:

-THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
-THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE
SOLDER APPLICATION WITH A 1.60±0.10MM
CIRCUIT BOARD.SEE APPLICATION NOTES/PROCEDURES IF
THEY ARE AVAILABLE

5.PACKAGE TYPE:

72830-XXXLF: TUBE PACKING
72830-XXXRLF: TAPE AND REEL PACKING

RELEASE	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
0.X	±0.30
0.XX	±0.15
0.XXX	±0.05
0°	±2°

Performance level	
72830-XXXLF	Telcordia CO.

dr	Andy Zhang	2010/11/02	projection	MM	size	A4	scale	1.000				
eng	John Han	2013/09/12			ecn no	ELX-N-15807-1						
chr	-	-			rel level	Released						
appr	Rick Bian	2013/10/30	Family: SOFIX SHIELDED I/O									
	title			2X4 RA CONNECTOR			dwg no		72830		rev	
	SOLDER			G								
www.fci.com	cat. no.		72830-20x		Product - Customer Drw				sheet 1 of 2			




Copyright FCI.

SEE NOTE 5

Product number		Made from					
Item		I			Column		
		Housing	Row	Number	4	3	2 1
72830-201LF 72830-201RLF	72706-001		B	8	O	O	O
			A		N	N	N
72830-202LF	72706-001		B	8	S	S	O
			A		N	N	N
72830-203LF 72830-103LF	72706-001		B	8	S	S	S
			A		N	N	R

Item	Dim A
N	5.75
O	5.00
R	5.00
S	5.75



spec ref		RELEASE				dr		Andy Zhang	2010/11/02	projection		MM		size		A4	scale		1.000			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		John Han	2013/09/12					ecn no		ELX-N-15807-1						
						chr		-	-					rel level		Released						
						appr		Rick Bian	2013/10/30					Family:		SOFIX SHIELDED I/O						
surface		linear		0.X	±0.30			title		2X4 RA CONNECTOR				dwg no		72830				rev		G
				0.XX	±0.15																	
				0.XXX	±0.05																	
		angular		0°	±2°	www.fci.com		cat. no.		72830-20x		Product - Customer Drw				sheet 2 of 2						